



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04004100.6

RECEIVED	
16 FEB 2005	
WIPO	PCT

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 04004100.6
Demande no:

Anmeldetag:
Date of filing: 24.02.04
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

MERCK PATENT GmbH
Frankfurter Strasse 250
64293 Darmstadt
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Liquid crystal composition for bistable liquid crystal devices

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G02F/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

**Merck Patent Gesellschaft
mit beschränkter Haftung**

64271 Darmstadt

**Liquid crystal composition for bistable liquid
crystal devices**

Liquid crystal composition for bistable liquid crystal devices

5 The invention is directed to liquid crystal compositions for use in bistable liquid crystal devices and to bistable liquid crystal devices containing said liquid crystal compositions.

Electrooptical devices utilizing liquid crystal media for displaying information are well known and used in a wide variety of technical applications (see, for a review, H. Kawamoto, Proc. IEEE, 90, 460 (2002)).
10 Among these, nematic liquid crystal devices are the most prominent; there are, for instance, twisted nematic (TN) liquid crystal devices (M. Schadt and W. Helfrich, Appl. Phys. Lett., 18, 127 (1971)) and super-twisted nematic (STN) liquid crystal devices (see, inter alia, T.J. Scheffer and J. Nehring, Appl. Phys. Lett., 48, 1021 (1984)). These devices are
15 monostable, i.e. the liquid crystal medium is switched to an ON state by application of a suitable voltage, and is allowed to switch to an OFF state when the voltage applied falls below a lower voltage level.

In order to display complex information, electrooptical devices need to
20 comprise a number of picture elements that can be switched independently of each other. However, when direct or even multiplex addressing of pixels are used, the number of elements addressable in nematic liquid crystal displays is limited, in the first case by mere geometrical requirements of the electrical connections and in the second
25 case by the steepness of the device's transmission versus the voltage curve.

This limitation can be overcome by incorporating thin film transistors (TFT) into each picture element. Such devices, also known as active matrix (AM)
30 displays, enable addressing of a high number of picture elements and thus of large area, high resolution displays and with relatively low voltage requirements. Some of these devices are also mechanically rather stable and have a wide temperature range.

35

Usually AM-TFT displays are operated in a monostable driving mode. Hence, the device has no intrinsic or internal memory and constant update of the display even for static images is required. This may cause relatively high power consumption and rather poor battery life-time.

5

Another type of liquid crystal device are displays with an internal memory effect, e.g. a bistable liquid crystal device. Bistability means that the molecules of the liquid crystal medium inside the device can adopt two different stable states. Consequently, by applying a suitable addressing scheme, the liquid crystal molecules of the medium are switched into a first stable state that persists even after addressing; utilization of another addressing scheme causes the liquid crystal molecules to adopt a second stable state that likewise persists after addressing. For some specific applications direct or multiplex addressing of such bistable liquid crystal compositions is suitable, and thus the more complicated AM addressing is not required for these applications. However, if desired, AM addressing may also be used for driving bistable liquid crystal devices.

10

15

Ferroelectric liquid crystal displays using smectic liquid crystal materials can be made into bistable devices. They have, however, several disadvantages, e.g. lack of shock resistance, narrow operating temperature range, and low cell gap causing manufacturing difficulties. Therefore, these ferroelectric liquid crystal devices are unlikely to fulfill the requirements to displays for the devices mentioned above.

20

25

However, not only ferroelectric smectic liquid crystals are capable of being used in bistable devices but also nematic liquid crystals. Besides other approaches that utilize bistable bulk configurations adopted by nematic liquid crystals (see, for instance, I. Dozov *et al.*, "Recent improvements of bistable nematic displays switched by anchoring breaking (BiNem[®])", Proceedings SID 01 (2001), 16.1, 224 and references therewithin), a promising way of achieving bistability in a nematic liquid crystal display is to use a surface alignment which can support two or more stable states. As discussed in literature (see, for instance, J.C. Jones, G. Bryan-Brown, E. Wood, A. Graham, P. Brett and J. Hughes, "Novel bistable liquid crystal displays based on grating alignment", in "Liquid Crystal Materials, Devices,

30

35

and Flat Panel Displays", R. Shashidhar, B. Gnade, Eds., Proceedings of SPIE Vol. 3955 (2000), 84 and references cited therein) two types, azimuthal and zenithal bistability, can be distinguished.

5 In the first instance (i.e. azimuthal bistability), the director of the liquid crystal molecules in the display having a grating alignment on the surface of one of the display cell's plates (or substrates) will lie parallel to said plate in both stable states; that means that switching between the stable states occurs within the plane of the display cell's plates (see, for instance, 10 WO 92/00546 and WO 95/22077 which describes the use of a substrate having a bigrating alignment layer). However, reproducing selection of the stable states is found to be difficult and switching generally requires a high switching voltage.

15 On the other hand, zenithal bistability is observed when the zenithal bistable surface is used (see Figure 1; the tiny lines represent the local director of the liquid crystal molecules that are oriented by interaction with the surface grating and appropriate alignment layer). With such a surface, the director of the liquid crystal molecules has two possible configurations with different pretilt angles in the same azimuthal plane (i.e. the plane 20 perpendicular to the surface of the display cell's substrate). The first state is the continuous high tilt state (C) while the second state is the defect low tilt state (D). The grating of the zenithal bistable surface is defined by its amplitude a and its pitch L ; typical values are for L of about $1\text{ }\mu\text{m}$ and for a of about 0.6 to $0.8\text{ }\mu\text{m}$ (see WO 97/14990 and, for more details, WO 25 02/08825; and J.C. Jones, G. Bryan-Brown, E. Wood, A. Graham, P. Brett and J. Hughes, "Novel bistable liquid crystal displays based on grating alignment", in "Liquid Crystal Materials, Devices, and Flat Panel Displays", R. Shashidhar, B. Gnade, eds., Proceedings of SPIE Vol. 3955 (2000), 30 84).

A homeotropic orientation can be induced, for example by coating the grating with a homeotropic alignment layer. This homeotropic alignment induced orientation ensures that the director of the liquid crystal molecules 35 does not lie parallel to the grooves of the grating. Although the orientation of the director of the liquid crystal molecules is perpendicular to the (local)

surface, i.e. varying with the location on the surface along a direction perpendicular to the grooves, the orientation in the "bulk" is very much influenced by the opposite surface alignment in both states. Switching from one stable state to the other may be achieved by applying a simple electrical pulse thereby causing a switch from a black display or picture element to a white one (or vice versa) with the appropriate polariser configuration and retardation. Switching back to the original state occurs upon application of a pulse of opposite polarity thereby causing a switch from white to black (or vice versa). Switching may also be induced by using pulses of same polarity but with much higher voltages (also referred to as "reverse switching"); however, reverse switching is a detrimental effect which limits the operation of a zenithal bistable nematic device in terms of the addressing and so a high a voltage as possible is desired for the reverse switching.

In general, for obtaining zenithal bistability only one of the two display cell substrates is provided with a surface grating. The opposite plate may have a surface providing a homeotropic alignment of the liquid crystal director (VAN mode, see Figure 2a)) or a surface inducing planar alignment of the director (twisted (TN) mode, see Figure 2b)) thereby causing the twisting of the liquid crystal director around the axis perpendicular to the substrates across the cell for the low tilt state. Exact details regarding cell geometry and configuration, exact cell parameters, addressing means, assembling of the entire zenithal bistable device (including use of polarisers) etc. are disclosed in WO 97/14990; E.L. Wood, G.P. Bryan-Brown, P. Brett, A. Graham, J.C. Jones, and J.R. Hughes, "Zenithal Bistable Device (ZBDTM) Suitable for Portable Applications, SID 00 Digest (2000), 124; J.C. Jones, J.R. Hughes, A. Graham, P. Brett, G.P. Bryan-Brown, and E.L. Wood, "Zenithal Bistable Devices: Towards the electronic book with a simple LCD", IDW '00 (2000), 301; J. C. Jones, S. M. Beldon and E. L. Wood, "Greyscale in Zenithal Bistable LCD: The Route to Ultra-low Power Colour Displays", seminar talk on the ASID meeting 2002 of the Society for Information Display, Singapore, September 2002; and the detailed discussion given in J.C. Jones, G. Bryan-Brown, E. Wood, A. Graham, P. Brett and J. Hughes, "Novel bistable liquid crystal displays based on grating alignment", in "Liquid Crystal Materials, Devices, and Flat Panel

Displays", R. Shashidhar, B. Gnade, eds., Proceedings of SPIE Vol. 3955 (2000), 84, and references cited therein.

Utilizing zenithal bistability in electrooptical devices offers attractive features, inter alia:

- 5 ▪ Image retention on a display without continuous update combined with
- High mechanical shock stability
- Low power consumption since the display only needs addressing
- 10 when the image changes
- Eminent suitability for use with plastic substrates

Moreover, both transmissive and reflective modes are possible in displays utilizing zenithal bistability. A display using a transmissive mode requires a
15 backlight on the display's rear side being permanently switched on. This contributes significantly to the overall power consumption of the display. Further, when using the transmissive display under conditions of high brightness, e.g. in direct sunlight, the contrast may become rather poor rendering the display almost unreadable. To the contrary, a reflective
20 display has no backlight but a reflector on its rear side thereby utilizing the surrounding light falling on the display for its illumination by reflection. Power consumption is lower compared to the transmissive display, and the contrast is good under conditions of high brightness making the reflective display especially useful for outdoor and daylight use. However, under
25 poor illumination conditions, e.g. in the darkness, the reflective display becomes hardly readable. Therefore, so-called transflective displays have been suggested and disclosed (see, for instance, US 2003/0043323 A1) in order to overcome the disadvantages of both transmissive and reflective modes while still utilizing their advantages. In general, a transflective
30 display is utilizing the reflective mode using a partial reflector on the rear side of the display so that in the transmissive mode a backlight can be turned on in order to fit the lighting conditions.

Reflective and transflective modes both may be applied to displays utilizing
35 zenithal bistability (see, e.g., J.C Jones, P. Worthing, G. Bryan-Brown, E. Wood, SID 03 Digest (2003), P-14.1). The display geometries that are

favoured for these applications are the vertically aligned nematic (VAN) mode for a single polarizer device in the retardation mode (see Figure 3a)) and the twisted nematic (TN) mode for single and two-polariser devices in the polarization mode (with the two-polariser device shown in Figure 3b)).

5 (However, other display geometries like, for instance, the Mixed mode of twisted nematic liquid crystal compositions (MTN mode; S.-T. Wu, C.-S. Wu, Appl. Phys. Lett. 68 (11) 1996, 1455) may also be used.) The two-polariser reflective device works in the modified TN 1st minimum condition (C.H. Gooch and H.A. Tarry, "The Optical Properties of Twisted Nematic Liquid Crystal Structures with Twist Angles $\leq 90^\circ$ ", J. Appl. Phys. D: Appl. Phys., Vol. 8, p.1575-1584, 1975) with $d_{\text{opt}} \approx \frac{\sqrt{3}}{2} \frac{\lambda_0}{\Delta n} + 0.4$, whereby λ_0 is

10 0.555 μm and d_{opt} is the optimal cell gap as for the standard transmission mode. For optimum viewing angles it preferably uses the lowest defect state pretilt on the grating of the zenithal bistable surface, which in turn

15 actually requires a lower Δn for the same cell gap. The 0.4 μm factor is an adjustment to give the best optical performance for a given birefringence with the defect state pretilt currently used. For the single polariser TN mode, however, the twisted state is used to give the black state and the

20 hybrid state is then the white state, as it has no retardation if the appropriate polariser orientation is used.

For the single polariser VAN-HAN mode (Fig. 3a)) the VAN state (high tilt C state in Fig. 3a)) does cause any retardation and so appears white

25 against a reflector. The hybrid aligned (HAN) state (low tilt D state in Fig 3a)), however, will have some retardation and if this acts as a quarter-wave plate (i.e. with the two passes then equivalent to a half-wave plate causing a 90° rotation of the plane of polarized light) it appears black as there is no transmission of the reflected light at the polariser. (Here, the optimal cell

30 gap is given by $d_{\text{opt}} \approx \frac{\lambda_0}{2\Delta n} + 0.4$.) The optical performance of such a device may be improved by using a quarter-wave plate between the polariser and liquid crystal cell, and in this case the optical states are reversed (i.e. the VAN state is black and the HAN state is white).

Besides the assembly and make up of the zenithal bistable display, another key issue to the zenithal bistable device technology is the nematic liquid crystal medium used inside the display cell.

5 The zenithal bistable device and hence the liquid crystal medium have to meet several requirements more or less depending on the specific use of the device. Since there is no consistent theory so far that might predict the physical variables to be optimized, it turned out to be helpful to use a set of (semi-)empirical parameters for evaluating liquid crystal media with respect to their usefulness in zenithal bistable nematic devices. These are 10 illustrated in the so-called τ -V curve for switching voltages of pulse duration τ and for 10 and 90% switching levels with opposite polarities (see figure 4) for a liquid crystal mixture of the prior art, namely MLC-6204-000 of Merck KGaA, Darmstadt, Germany.

15 Firstly, in order to minimize power consumption, to allow more flexibility with the addressing of the device's picture elements and to remain within the limits of standard commercial electronic drivers and associated components, a low *switching field* and correspondingly a low *operating* 20 *voltage* is desirable for switching from one bistable state to the other. The following applies to either the VAN (without a quarter-wave plate) or TN modes when viewed in transmission between crossed polarisers. For material comparison one can determine the switching field E for a pulse (usually a 100 μ s or 1000 μ s pulse duration) from the switching voltage V 25 that gives a transmission change from, e.g., 0 to 90% transmission (black-to-white; B-W or C-D) for a particular liquid crystal mixture in a given test cell providing zenithal bistability. (In general, one can also use the 100 to 10% transmission change transition of white-to-black, W-B or D-C, where the switching field of which may be higher or lower than the B-W transition 30 depending on the grating's shape and dimensions.) For practical reasons, the average of both the black-to-white transition and the white-to-black transition may be used as in the present specification. In order to take into account the electric field effect of the grating (dependent on the relative permittivities of the liquid crystal and the grating, the grating shape and the cell gap) the value of E actually measured is corrected to distinguish the 35 field just across the liquid crystal again for comparison purposes giving the

corrected switching field $E_{LC@1000\mu s}$ for a 1000 μs pulse. Here, an additional estimated factor of $1.5\mu m$ is added to the cell gap d when calculating the field just across the liquid crystal:

$$5 \quad E_{1000\mu s} = V_{1000\mu s}/d \text{ and } E_{LC@1000\mu s} = V_{1000\mu s}/(d + 1.5) \text{ where } d \text{ is in } \mu m.$$

10 Multiplying $E_{LC@1000\mu s}$ with optimum cell gap d_{opt} gives the operating voltage V_{opt} corresponding to the optimum cell gap for a 1000 μs pulse for just the liquid crystal. $E_{LC@1000\mu s}$ and so V_{opt} depend on the liquid crystal medium used. Here, the optimum cell gap is considered for the VAN-HAN mode of Fig. 3a) but comparisons can also be made for the single polariser HAN-TN mode. If the hybrid state is to act as a quarter-wave plate, the optimum cell gap can be approximated by $d_{opt} = (\lambda/2\Delta n) + 0.4$ (in μm) with $\lambda = 0.555 \mu m$ and Δn being the optical anisotropy of the liquid crystal medium, and the additional factor of $0.4\mu m$ is included as this has been found to give the best optical performance for the gratings currently used. The modified 1st minimum condition for the two polariser HAN-TN mode is then $d_{opt} = (\lambda\sqrt{3}/2\Delta n) + 0.4$. As mentioned earlier, the defect state pretilt can be increased to permit larger cell gaps without material improvements but the viewing angle is poorer (and the necessary cell gap may still be much less than $5\mu m$ in some cases). It is desirable to have the defect state pretilt less than 20° .

25 The second empirical parameter that might be taken into account is the operating window ΔV_{opt} corresponding to the optimum cell gap. It describes the effect of reverse switching: When applying a pulse with a given time slot of, e.g. 400 μs or 1000 μs , and a defined pulse polarity, e.g. B-W, one observes the desired switching at a specific value of the switching field and a further reverse switching (e.g. W-B in this case) which is not induced by a pulse of inverse polarity but by a pulse of the same polarity at an increased switching field. For technical purposes, obviously said operating window ought to be as wide as possible to permit more flexibility of the driving schemes used and particularly in relation to achieving good greyscale operation (see J. C. Jones, S. M. Beldon and E. L. Wood, "Greyscale in Zenithal Bistable LCD: The Route to Ultra-low Power Colour Displays", seminar talk on the ASID meeting 2002 of the

Society for Information Display, Singapore, September 2002. In the example disclosed in this paper for a sub-divided grating, the regions have pitches of 0.6 μm , 0.7 μm , 0.8 μm and 0.9 μm and the switching threshold variation across the bistable window was 6V. Therefore, to achieve the maximum number of such error-free greyscale levels the operating window has to be greater than 6V, meaning $\Delta E_{\text{LC@1000}\mu\text{s}}$ should be greater than ~1.5V/ μm but preferably greater than 5V/ μm). The corresponding field can be represented by $\Delta E_{\text{LC@1000}\mu\text{s}}$, that is the corrected difference between the 90% reverse switching field and the 90% B-W switching field for a 1000 μs pulse:

$$\Delta E_{1000\mu\text{s}} = \Delta V_{1000\mu\text{s}}/d \text{ and } \Delta E_{\text{LC@1000}\mu\text{s}} = \Delta V_{1000\mu\text{s}}/(d+1.5) \text{ where } d \text{ is in } \mu\text{m}.$$

Taking into account the optimum cell gap d_{opt} by multiplying with $\Delta E_{\text{LC@1000}\mu\text{s}}$ eventually gives the operating window ΔV_{opt} ($d_{\text{opt}}\Delta E_{\text{LC@1000}\mu\text{s}} = \Delta V_{\text{opt}}$).

A further parameter of great importance is the *clearing point* T_{NI} of the liquid crystal medium describing the temperature at which the nematic mixture becomes isotropic. For many technical purposes and for increasing the variability of electrooptical devices utilizing zenithal bistability (and so the possible applications), liquid crystal media having a high clearing point, preferably of at least 70 °C, more preferred at least 80 °C or more, are desired.

Still another parameter, the *optical response time* τ_{opt} corresponding to the optimum cell gap, describes how fast the liquid crystal medium changes between stable states upon application of an electric pulse. It can be determined by measuring the response time τ for the 10-90 % B-W transition, for example using a 100 μs or a 1000 μs pulse, in the actual test cell; then, in order to normalize the experimental values, τ is multiplied by $(d_{\text{opt}}/d)^2$ giving τ_{opt} (with d_{opt} being the optimum cell gap as calculated above for V_{opt} and d being the actual cell gap of the test cell used). The W-B transition is much faster (less than 1ms) and so indeed the B-W response time is of most importance when assessing the properties of the liquid crystal medium used. The smaller τ_{opt} the faster the optical response

of the liquid crystal medium. A small τ_{opt} (of about 60 ms or, preferably, less than about 35 ms) may be desirable for certain electrooptical applications.

5 A further parameter being of some relevance for reflective and transfective bistable nematic devices is the *birefringence* Δn of the liquid crystal mixture used. Due to the correlation between Δn and the cell gap d , Δn needs to meet specific requirements if displays having a practically useful cell gap of about 5 μm are employed. (A much smaller cell gap, for example of less
10 than 3 μm , is not desired due to practical manufacturing reasons.) With regard to the two-polariser reflective mode (see, e.g., Figure 3b)) and to the TN 1st minimum condition as given previously, Δn is desirably of about 0.11 or less, particularly when a lower defect state pretilt at the grating is favoured for improved optical performance.


15 Those liquid crystal media the use of which in zenithal bistable devices have been described in the prior art do not meet all the parameter requirements outlined above. Even liquid crystal mixture MLC-6204-000 (available from Merck KGaA, Darmstadt, Germany) that has been used in
20 zenithal bistable devices as the preferred medium (WO 01/40853, Example 6; J.C. Jones, G. Bryan-Brown, E. Wood, A. Graham, P. Brett and J. Hughes, "Novel bistable liquid crystal displays based on grating alignment", in "Liquid Crystal Materials, Devices, and Flat Panel Displays", R. Shashidhar, B. Gnade, Eds., Proceedings of SPIE Vol. 3955 (2000), 84)
25 has a clearing point T_{NI} of only 62.4 °C that is rather low for use in zenithal nematic bistable device for many possible applications, especially portable ones. Furthermore, it has a rather high V_{opt} and a rather small ΔV_{opt} .

30 The present invention therefore encounters the problem to provide a liquid crystal composition that is suitable for use in a bistable liquid crystal device and especially in a reflective or transfective zenithal bistable nematic device and has an improved set of properties.

35 The problem is solved by a liquid crystal composition for use in a bistable liquid crystal device, said device being preferably a zenithal nematic liquid crystal device, whereby said composition comprises a component (π) said

component (π) containing one or more compounds having a phenyl ring of formula A

5



A

whereby

10

X^A is F, Cl, SF₅, NCS, or a C₁ to C₈ alkanyl, alkenyl or alkoxy radical substituted with at least one F atom; and
L^A is H or F.

15

A further subject matter of this invention is a bistable liquid crystal device comprising

20

- two outer substrates which, together with a frame, form a cell;
- a liquid crystal composition present in said cell;
- electrode structures with alignment layers on the inside of said outer substrates whereby at least one alignment layer comprises an alignment grating that permits the liquid crystal composition to adopt at least two different stable states whereby the assembly of said electrode structures with said alignment layers being such that in a first driving mode a switching between the said at least two different stable states is achieved by applying suitable electric signals to said electrode structures;
- whereby said liquid crystal composition is said liquid crystal composition as described above and below and that comprises said component (π).

25

30

35

In particular, said bistable liquid crystal device is a zenithal bistable nematic liquid crystal device in which said electrode structures with alignment layers on the inside of said outer substrates have at least one alignment layer that comprises an alignment grating that permits the compounds of said liquid crystal composition to adopt at least two different stable states with different pretilt angles in the same azimuthal plane

whereby the assembly of said electrode structures with said alignment layers being such that a switching between the said at least two different stable states is achieved by applying suitable electric signals to said electrode structures.

5

The bistable liquid crystal device according to the invention may be, for instance, a transmissive, reflective or transreflective display; it may even be of a more complex device construction as it is known in the art. It is particularly preferred that the bistable liquid crystal device according to the invention is a reflective or transreflective display and especially a reflective or transreflective zenithal bistable nematic liquid crystal display.

10

Furthermore, it has surprisingly been found that the liquid crystal composition for bistable liquid crystal devices according to the present invention are not only suitable for conventional passive matrix (PM) (or direct or multiplex addressed) bistable liquid crystal devices but for bistable liquid crystal devices that may be operated over an active matrix (AM), particularly over an AM addressing with a TFT (thin film transistor) array. (TFT-AM displays are well known to those skilled in the art and generally described in, e.g., the Merck brochure "Flüssigkristalle für Aktivmatrix-Flachbildschirme" [Liquid Crystals for Active Matrix Flat Panel Displays], M. Heckmeier, G. Lüssem, K. Tarumi, W. Becker, Merck KGaA, Darmstadt, Germany, 2003.) Moreover, this further allows the use of the liquid crystal composition according to the present invention in a liquid crystal device that is operated and/or operable in a so-called "dual mode" one of which being a bistable mode and the other one being a monostable mode. Therefore, a further subject matter of the present invention is a bistable liquid crystal device that comprises electrode structures the assembly of which allowing the switching between said at least two different stable states in said first driving mode (i.e. the bistable mode) and a switching of said liquid crystal composition in a second driving mode that is the monostable mode. This device operated and/or operable in the dual mode will be described in greater detail somewhere below in this specification. (It should be recognized that said bistable mode may be addressed by a passive matrix (PM) or direct or multiplex addressing or even an active matrix (AM). In the context of the present invention it is preferred that both

15

20

25

30

35

said bistable mode and said monostable mode of said dual mode are driven by an active matrix (AM) TFT mode.)

5 It will be acknowledged that the invention is described hereinafter primarily with regard to the use of the liquid crystal composition above in a zenithal bistable nematic liquid crystal device although it may be used in other liquid crystal devices as well, for instance, in bistable liquid crystal devices like azimuthal bistable liquid crystal devices as disclosed, inter alia, in WO 92/00546 and WO 95/22077. Thus, details are given for the zenithal
10 bistable nematic liquid crystal device but can easily be adapted to the requirements of other types of bistable liquid crystal devices.

The cell that is part of the zenithal bistable nematic device according to the invention may be any conventional cell that allows the nematic liquid
15 crystal composition to adopt at least two different zenithal bistable states. Two possible stable states are schematically depicted in Figure 1. The two different zenithal bistable states are characterized by two different pretilt angles that are adopted by the liquid crystal molecules in the same azimuthal plane. The cell comprises a frame and two outer substrates or
20 plates and has electrode structures with alignment layers on the inside of said substrates. At least one of these alignment layers has an zenithal alignment grating known to those skilled in the art and as described, for instance, in WO 97/14990, WO 01/40853, WO 02/08825, and J.C. Jones, et al., Proceedings of SPIE Vol. 3955 (2000), 84.

25 The electrode structures are assembled with the alignment layer(s) in such a way that (in the case of two stable states) switching from one stable state to the other can be achieved by applying suitable electric signals to the electrode structures thereby applying said electric signals to the liquid
30 crystal composition inside the cell. Commonly, single pulses can be used as such suitable electric signals. Details are known to the artisan and described in WO 97/14990, WO 01/40853, WO 02/08825, J.C. Jones, J.R. Hughes, A. Graham, P. Brett, G.P. Bryan-Brown, IDW '00 (2000), 301, J.C. Jones, et al., Proceedings of SPIE Vol. 3955 (2000), 84, and E. L. Wood,
35 P. J. Brett, G. P. Bryan-Brown, A. Graham, R. M. Amos, S. Beldon, E.

Cubero and J. C. Jones, "Large Area, High Resolution Portable ZBD Display", SID 02 Digest (2002), 22-25.

5 The substrate opposite to the substrate having the grating alignment layer may have a homeotropic alignment due to suitable surface treatment (see Figure 2a)). Switching upon application of an electric pulse occurs from the high tilt or vertically aligned state to the low tilt or hybrid aligned state. This switch gives a black-to-white (B-W) change if the cell is placed between crossed polarizers (at 45° to the grating direction), with the brightest white state obtained when the vertically aligned state acts as a half-waveplate ($d\Delta n = \lambda/2$). This switching mode is called *VAN mode*. Zenithal bistable devices utilizing the VAN mode are very insensitive to cell gap variations. They require additional optical compensators to achieve wide viewing angles. A second switching mode of zenithal bistable devices is called *TN mode* (see Figure 2b)): The substrate opposite to the substrate having the grating alignment layer has a alignment layer, usually of rubbed polyimide, causing planar alignment of the liquid crystal molecules on said substrate. This in turn causes the twisting of the liquid crystal director around their axis perpendicular to the substrates across the cell. Switching upon application of an electric pulse now occurs from the low tilt or twisted aligned state to the high tilt or hybrid aligned state. This switch gives a black-to-white (B-W) change if the cell is placed between parallel polarizers and using the TN 1st minimum condition accounting for the influence of the ordinary refractive index of the hybrid state. Due to a high normal incidence contrast ratio additional optical compensators for achieving wide viewing angles are not required in a transmissive display. Therefore the TN mode is preferred for some of the technical applications of zenithal bistable nematic devices.

20

25

30 It is also possible to build up zenithal bistable reflective (or transfective) displays that are preferred embodiments of the present invention. Figure 3a)) depicts a reflective zenithal bistable nematic device in the VAN-HAN mode utilizing a single polariser (as explained above with regard to Figure 3a)). Figure 3b) depicts a reflective zenithal bistable device in the HAN-TN mode utilizing two polarisers one on each substrate of the cell (as explained above with regard to Figure 3b)).

35

For details of the build-up of zenithal bistable devices, also with regard to the polarisers used, it is referred to WO 97/14990, E.L. Wood, G.P. Bryan-Brown, P. Brett, A. Graham, J.C. Jones, and J.R. Hughes, SID 00 (2000), 124, and E. L. Wood, P. J. Brett, G. P. Bryan-Brown, A. Graham, R. M. Amos, S. Beldon, E. Cubero and J. C. Jones, "Large Area, High Resolution Portable ZBD Display" SID 02 Digest (2002), 22-25.

With regard to the addressing of the bistable liquid crystal device, especially the zenithal bistable nematic liquid crystal device, in which the liquid crystal composition described hereinbefore and hereinafter is used according to the invention, the conventional passive matrix (PM) addressing is usually sufficient for displaying information that is updated only infrequently. However, there are several reasons why it might be desirable to operate a bistable liquid crystal display over an active matrix. When displaying true video (i.e. fast changing images) the size of the display (i.e. the number of rows) for a PM device is limited by the time it takes to address all of the lines sequentially, and this ought to be < 16.7 ms or else the updating can be observed by the human eye. This means that if, for instance, the line address time were $100 \mu\text{s}$ then the maximum number of lines would be limited to 167 ($16.7 \text{ ms} / 100 \mu\text{s}$). However, one way to address a very large panel displaying video-rate information would be to use AM addressing with a TFT array.

This becomes particularly important when the optical response of the liquid crystal composition in the display driven in the bistable mode is above about 16.7 ms. Then the bistable mode alone is not capable of displaying video-rate information. As most PM bistable liquid crystal mixtures have longer response times than this, a way around the problem is to operate the device in what is known as the dual-mode format. This essentially means that for static or infrequently updated images the display would be operated in the bistable mode in the usual way but, for instance, if the geometry used is the TN one (or the VAN one) then the display could also be operated in the standard monostable TFT-TN mode (or the TFT-VAN mode, respectively) for fast changing images. It should be recognized that said bistable mode may be addressed by a passive matrix (PM) or direct or

multiplex addressing or an active matrix (AM). In the context of the present invention it is preferred that both said bistable mode and said monostable mode of said dual mode are driven by an active matrix (AM) TFT mode.

5 However, this implies that the liquid crystal composition used in the device operated and/or operable in the dual-mode format must accomplish specific requirements of both the "fast switching" monostable TFT mode and the somewhat "slower switching" bistable liquid crystal mode at the same time.

10 It has been found by the inventors that the liquid crystal composition for use in bistable liquid crystal devices exhibit an improved set of parameters making the composition suitable for the conventional bistable mode (especially the zenithal bistable nematic mode) as well as the dual-mode
15 format. These parameters are, inter alia, operating voltage and, especially, clearing point and voltage holding ration (VHR). The operating voltage is in a range useful for operating a zenithal bistable nematic liquid crystal device either in the conventional or a dual mode. It should be noticed that, for instance, the clearing point of the liquid crystal compositions for use in
20 the zenithal bistable nematic devices of the invention is significantly higher than the clearing point of liquid crystal mixtures previously used in zenithal bistable nematic devices. Moreover, the birefringence can be adjusted appropriately for transmissive, reflective and transfective displays. What is more, the operating window (ΔV_{opt}) is found to be much broader (it is
25 generally $> 3 \text{ V}/\mu\text{m}$) than in liquid crystal compositions for use in bistable liquid crystal devices previously known, and thus reverse switching does not impose any practically relevant problems here. Furthermore, in certain embodiments of the invention the optical response time τ_{opt} is decreased significantly. The liquid crystal compositions according to the present
30 invention also show an extended nematic phase range.

At the same time the VHR of the liquid crystal composition of the invention is high enough for use of AM addressing with a TFT array. This is necessary because in a standard active matrix (AM) LCD, each pixel is
35 addressed independently by a thin film transistor (TFT) (or sub-pixel when each pixel consists of more than one colour). The transistor charges a

pixel and acts electrically as a capacitor while all the other rows of the matrix are addressed. During the remainder of the frame time (typically 16.7ms corresponding to a frequency of 60Hz) the voltage drop across an addressed pixel must be as small as possible to avoid any change in contrast. The VHR is used to gauge this and is defined as the ratio of the root mean square (RMS) voltage during a single frame to the initial voltage value (V_0), and is usually expressed as a percentage:

$$\text{VHR} = \frac{1}{V_0} \left| \frac{1}{T_f} \int_0^{T_f} (V_0 \exp^{-t/RC})^2 dt \right|^{1/2}$$

where T_f is the frame time and RC is the time constant. VHR's > 90% and especially > 95% over the temperature operating range (and > 90% under severe UV loads) are usually required and achieved by the liquid crystal composition described and claimed herein. Some specific embodiments of the present invention even show VHR values of > 97% and especially of $\geq 98\%$. (The measurement of VHR's is usually performed according to proceedings known from the literature [S. Matsumoto et al., Liquid Crystals 5, 1320 (1989); K. Niwa et al., Proc. SID Conference, San Francisco, June 1984, p. 304 (1984); G. Weber et al., Liquid Crystals 5, 1381 (1989)]). For the purpose of this specification, however, the term "VHR" refers hereinafter to the voltage holding ratio over the temperature operating range, unless specified otherwise.

Conventional bistable liquid crystal devices have been discussed in detail hereinbefore with specific regard to zenithal bistable nematic liquid crystal devices. Devices utilizing a dual-mode format have also been known and described in the literature, for instance in WO 02/29775 A1 and WO 02/29776 A1 (both utilizing bistable chiral nematic liquid crystal material) as well as in WO 03/044763 A1. In general, such a dual-mode format can be described as follows:

In information display applications, such as notebook computers utilising the Microsoft WindowsTM operating system, or in the emerging field of interactive media, it is possible that the liquid crystal display may be expected to simultaneously display both a static and a moving image, with the majority of the display displaying static text and a small window displaying video. The diagram in Figure 5 below is a graphical

representation of this. Whereas it is possible to adopt such a visual appearance to the display in a conventional AM liquid crystal display, it is necessary to constantly update the entire display, as there is no inherent bistability. In the dual-mode display, the portion of the display displaying static text could be driven using an addressing scheme that utilises the bistable mode, and the portion of the display displaying a video image could be driven utilising an addressing scheme that utilises the conventional monostable mode. Thus, in principle each and every individual picture element (pixel) of the display can be driven in either mode. The combination of the inventive liquid crystal mixture concept, the bistability enabling surface, and appropriate drive schemes and electronics enable this.

In one embodiment of the present invention the liquid crystal composition for bistable liquid crystal devices, especially zenithal bistable nematic liquid crystal devices, is essentially free of compounds having a terminal ring to which at least one CN substituent is attached directly or indirectly. This means that liquid crystal compositions according to the invention may comprise besides said component (π) further compounds but should not comprise any substantial amounts (i.e. not more than about 1 to 2 weight% of the total weight of the mixture) of compounds with an end ring substituted with at least one cyano group (i.e. direct attachment) or a group that itself is substituted with at least one cyano group (e.g. a CN substituted alkyl radical) (i.e. indirect attachment). Preferably, the liquid crystal composition of this embodiment is completely free of such cyano substituted compounds. In this embodiment, VHR is sufficiently high, usually above 95%, preferably above about 97% and especially preferably above about 98%. The further compounds comprised in the bistable liquid crystal composition of this specific embodiment are, for instance, selected from those of formulas III to XIV as described in more detail elsewhere in this specification.


In still another preferred embodiment of the invention said component (π) is comprised in the liquid crystal composition according to the invention in an amount of at least 60 weight% or more (based on the total weight of the composition), especially in an amount of at least 80 weight%. (Since the

liquid crystal composition of this embodiment may or may not comprise further compounds not encompassed by component (π), it should be noted that compounds having a terminal ring bearing at least one direct or indirect -CN substituent may or may not be among these further compounds. However, it is preferred that the liquid crystal composition according to this embodiment of the present invention is essentially free of cyano substituted compounds, i.e. the composition does not contain more than about 1 to 2 weight% (based on of the total mixture) of CN substituted compounds. It is even more preferred that the compositions of this embodiment are completely free of such cyano substituted compounds.)

The liquid crystal composition according to the present invention may consist essentially or completely of said component (π) (i.e. 100 weight% of the mixture). It is, however, especially preferred that further compounds besides component (π) are comprised by the liquid crystal composition of the invention and that component (π) is contained in an amount of up to 99 weight%, more preferred in an amount of up to 95 weight%.

The compounds comprised by component (π) of the liquid crystal composition according to the present invention and having a phenyl ring of formula A are liquid crystalline and/or mesogenic compounds suitable for use in liquid crystal media, especially in nematic liquid crystal media. They may have 2, 3, 4 or even 5 rings (including the phenyl ring of formula A) that are usually connected either directly by a single bond or via appropriate linking units such that rod like molecules are formed.

The terminal phenyl ring(s) of formula A of the compounds constituting component (π) are preferably selected from the following formulas:

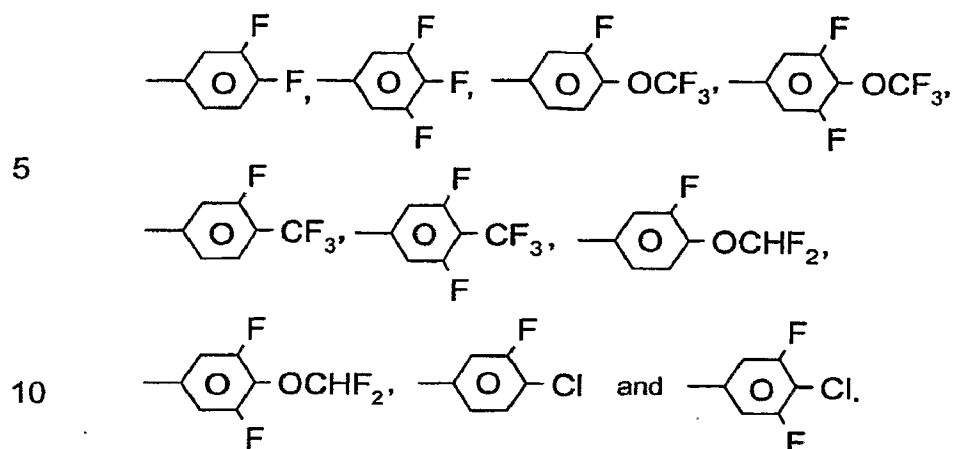

In other words, X^A in formula A is preferably F, Cl, OCF_3 or CF_3 . It is even more preferred that X^A is F or Cl, especially F.



15 Preferred compounds having a terminal phenyl ring of formula A and being comprised by component (π) of the liquid crystal composition according to the present invention are compounds of formulas I and II:

20

25

30

35

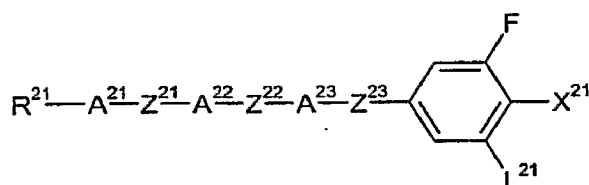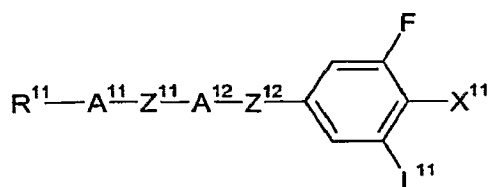

whereby

R^{11} and R^{21} are independently of each other C_1 - C_{15} alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by $-\text{O}-$, $-\text{S}-$, $-\text{CH}=\text{CH}-$, $-\text{C}\equiv\text{C}-$, $-\text{CO}-\text{O}-$, $-\text{OC}-\text{O}-$ such that there are no hetero atoms adjacent to each other;

Z^{11} , Z^{12} , Z^{21} , Z^{22} , Z^{23} are independently of each other a single bond, $-\text{CO}-\text{O}-$, $-\text{O}-\text{CO}-$, $-\text{CH}_2\text{O}-$, $-\text{OCH}_2-$, $-\text{CF}_2\text{O}-$, $-\text{OCF}_2-$, $-\text{CH}_2\text{CH}_2-$, $(-\text{CH}_2\text{CH}_2-)_2$, $-\text{CF}=\text{CF}-$, $-\text{CF}_2\text{CF}_2-$, $-\text{CH}_2\text{CF}_2-$, $-\text{CF}_2\text{CH}_2-$, $-\text{CH}=\text{CH}-$ or $-\text{C}\equiv\text{C}-$;


X^{11} and X^{21} are independently of each other is F, Cl, SF_5 , NCS, or a C_1 to C_8 alkanyl, alkenyl or alkoxy radical substituted with at least one F atom;

L^{11} and L^{21} are independently of each other H or F; and

A^{11} , A^{12} , A^{21} , A^{22} and A^{23} are independently of each other one of the following rings:

5

10

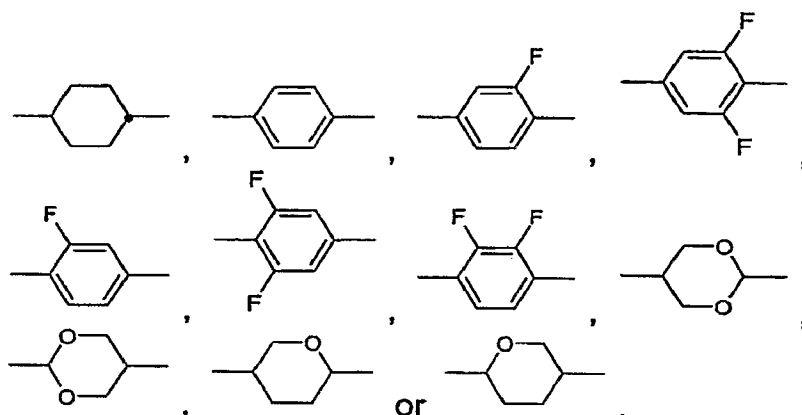

With regard to compounds of formula I it is more preferred that

R^{11} is a C_1 to C_8 alkanyl, alkenyl or alkoxy radical unsubstituted or substituted with at least one F atom, especially an unsubstituted and straight-chain alkanyl or alkenyl radical with 2, 3, 4, 5, 6 or 7 carbon atoms;

15


L^{11} is H or F, especially F;

X^{11} is F or Cl, especially F;

Z^{11} and Z^{12} are a single bond, $-CF_2O-$ or $-CO-O-$ whereby at least one of Z^{11} and Z^{12} is a single bond;


20

A^{11} is

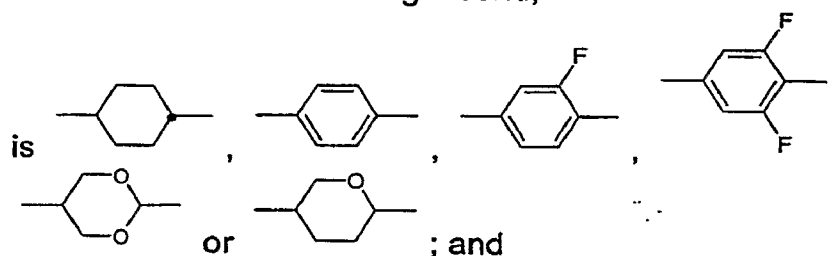

25


A^{12} is

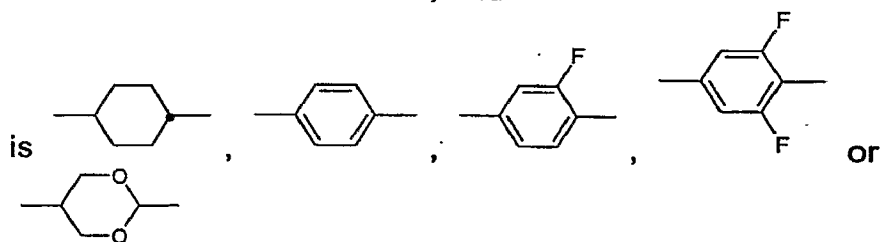

30

Preferred subformulas of formula I are inter alia:

35

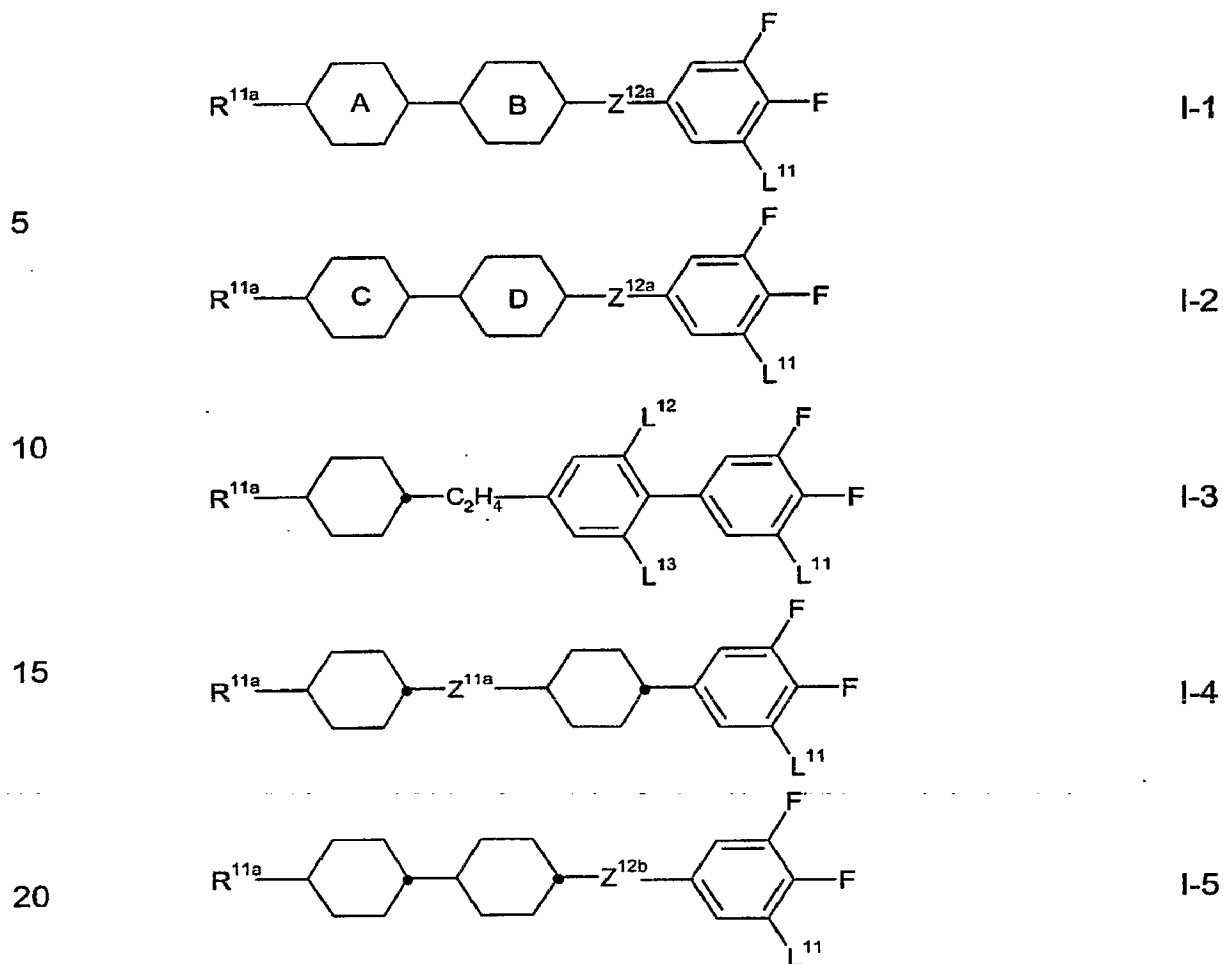

wherein

25 R^{11a} is defined as R^{11} in formula I and preferably an unsubstituted and straight-chain or branched alkanyl, alkoxy or alkenyl radical with up to 8 carbon atoms;


Z^{11a} and Z^{12b} are independently of each other $-C_2F_4-$, $-CF=CF-$, $-C_2H_4-$, $-OCH_2-$ or $-CH_2O-$;

30 Z^{12a} is a single bond, $-CF_2O-$ or $-CO-O-$;

L^{11} , L^{12} and L^{13} are independently of each other H or F;




is a 1,4-phenylene or trans-1,4-cyclohexylene ring;



35


is a 1,3-dioxan-2,5-diyl or tetrahydropyran-2,5-diyl ring; and




and



are independently of each other



5

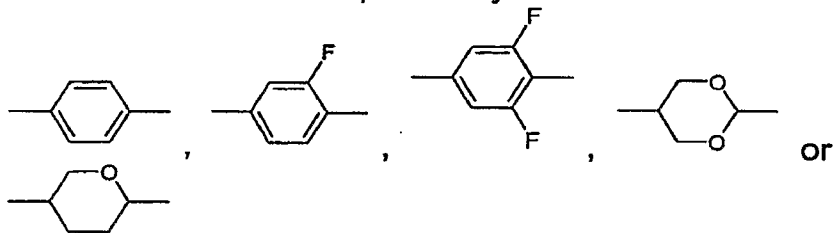


or

10

Preferably, compounds of formula I are selected from subformulas I-1 and I-2.


Some specific compounds of preferred compounds of formula I are the following ones:

15




I-A

20

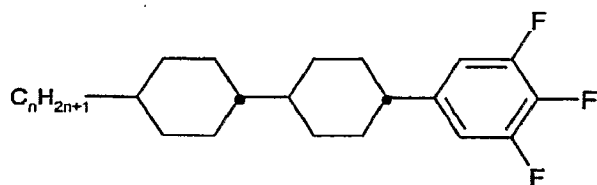


I-B

25

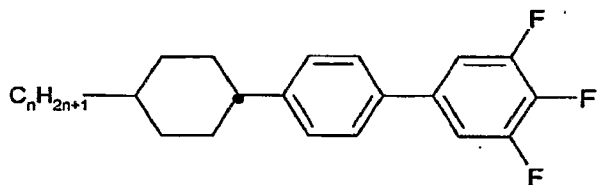


I-C

30

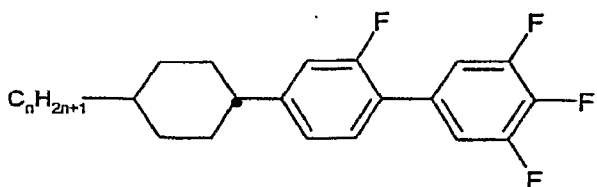

I-D



35

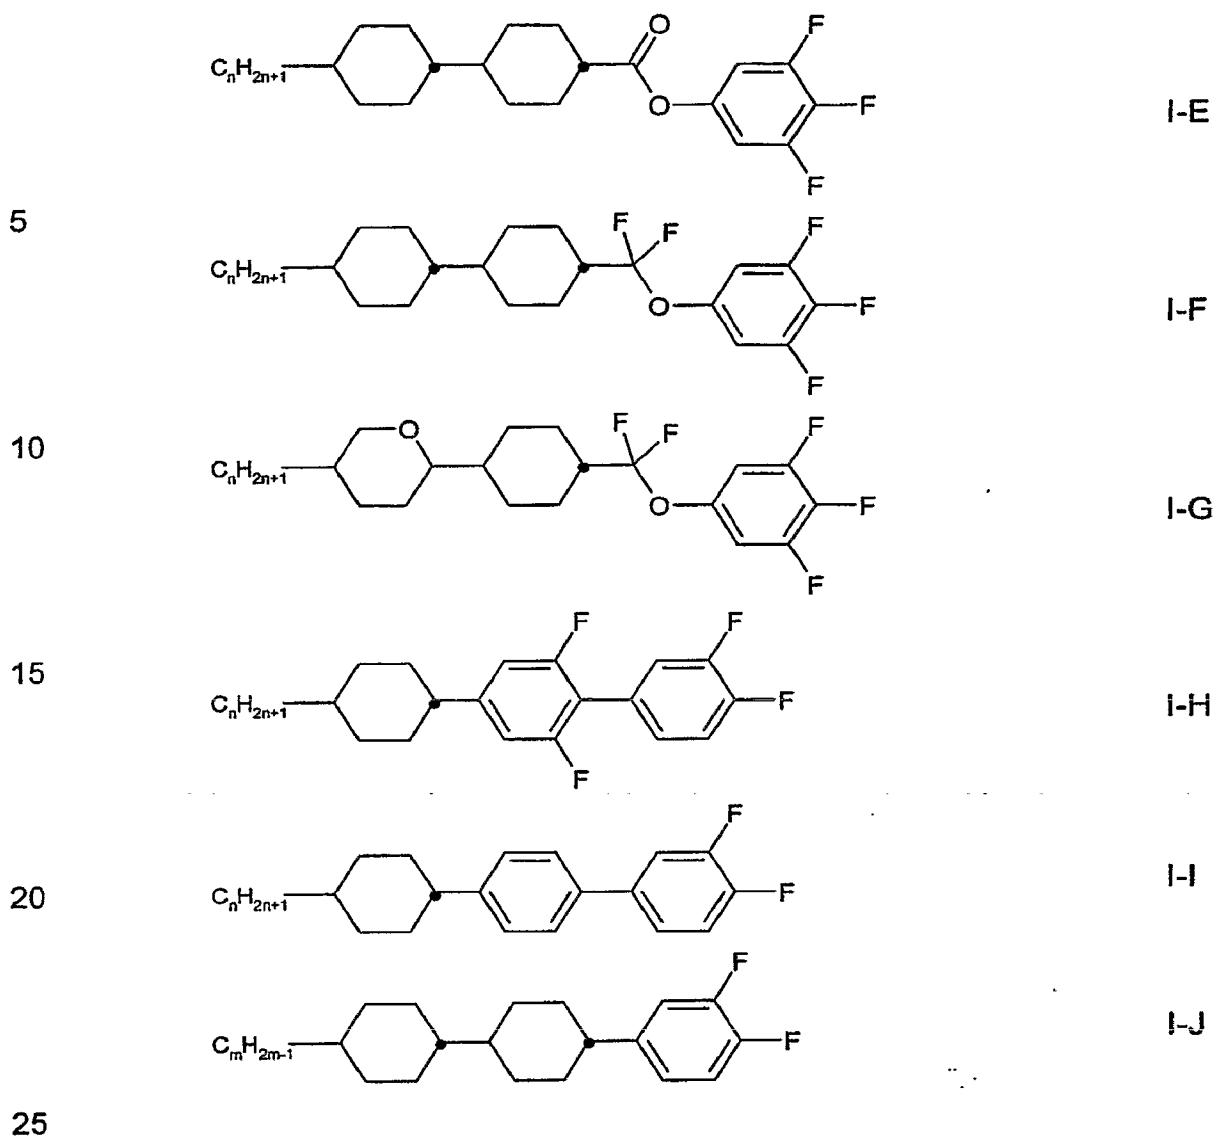

with n and m being independently of each other 2, 3, 4, 5, 6 or 7 and $C_nH_{2n+1}-$ and $C_mH_{2m-1}-$ both being preferably straight-chain radicals. It is especially preferred that n is 2, 3 and 5, while m is 2 or 3.




While liquid crystal compositions for use in bistable liquid crystal devices of the invention comprising compounds of the formulas I-A to I-J usually exhibit values of the birefringence Δn below about 0.11 which in many cases is desirable for reflective and transfective displays, in some other cases it might be useful to have liquid crystal compositions according to the present invention that show higher Δn values. In these cases it is


particularly preferred to have compounds of the following formulas included in component (π):

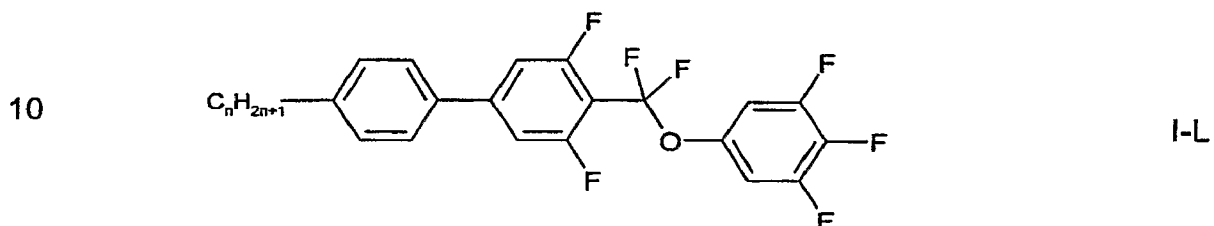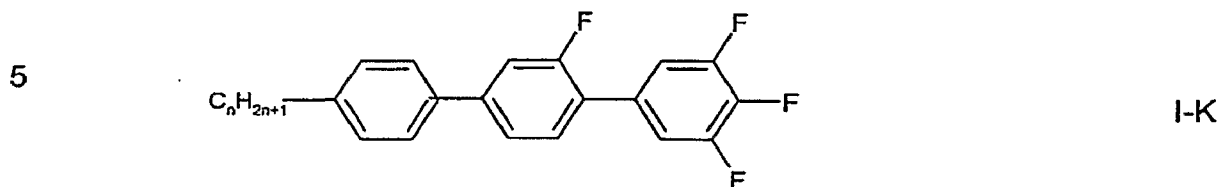


15 with n being 2, 3, 4, 5, 6 or 7 and C_nH_{2n+1} being preferably a straight-chain radical. It is especially preferred that n is 2, 3 and 5. It should be noted that besides these compounds of formulas I-K and I-L other compounds having a terminal phenyl ring of formula A may or may not be contained in component (π).

20 Some further compounds of formula I that may be comprised by component (π) of the liquid crystal composition according to the present invention are:

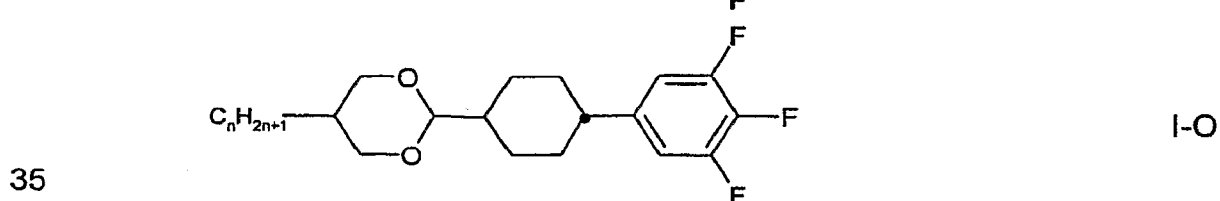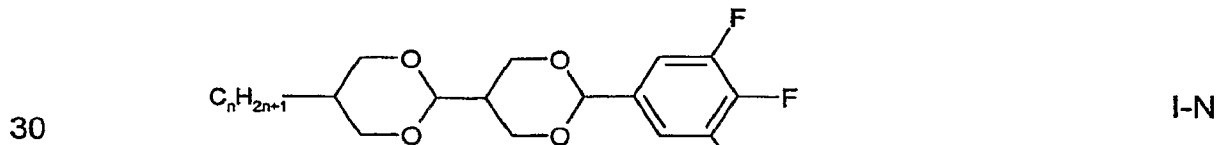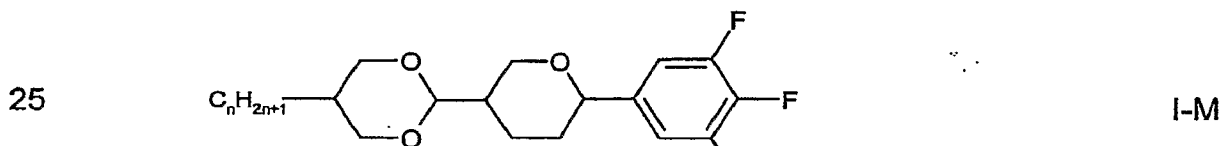


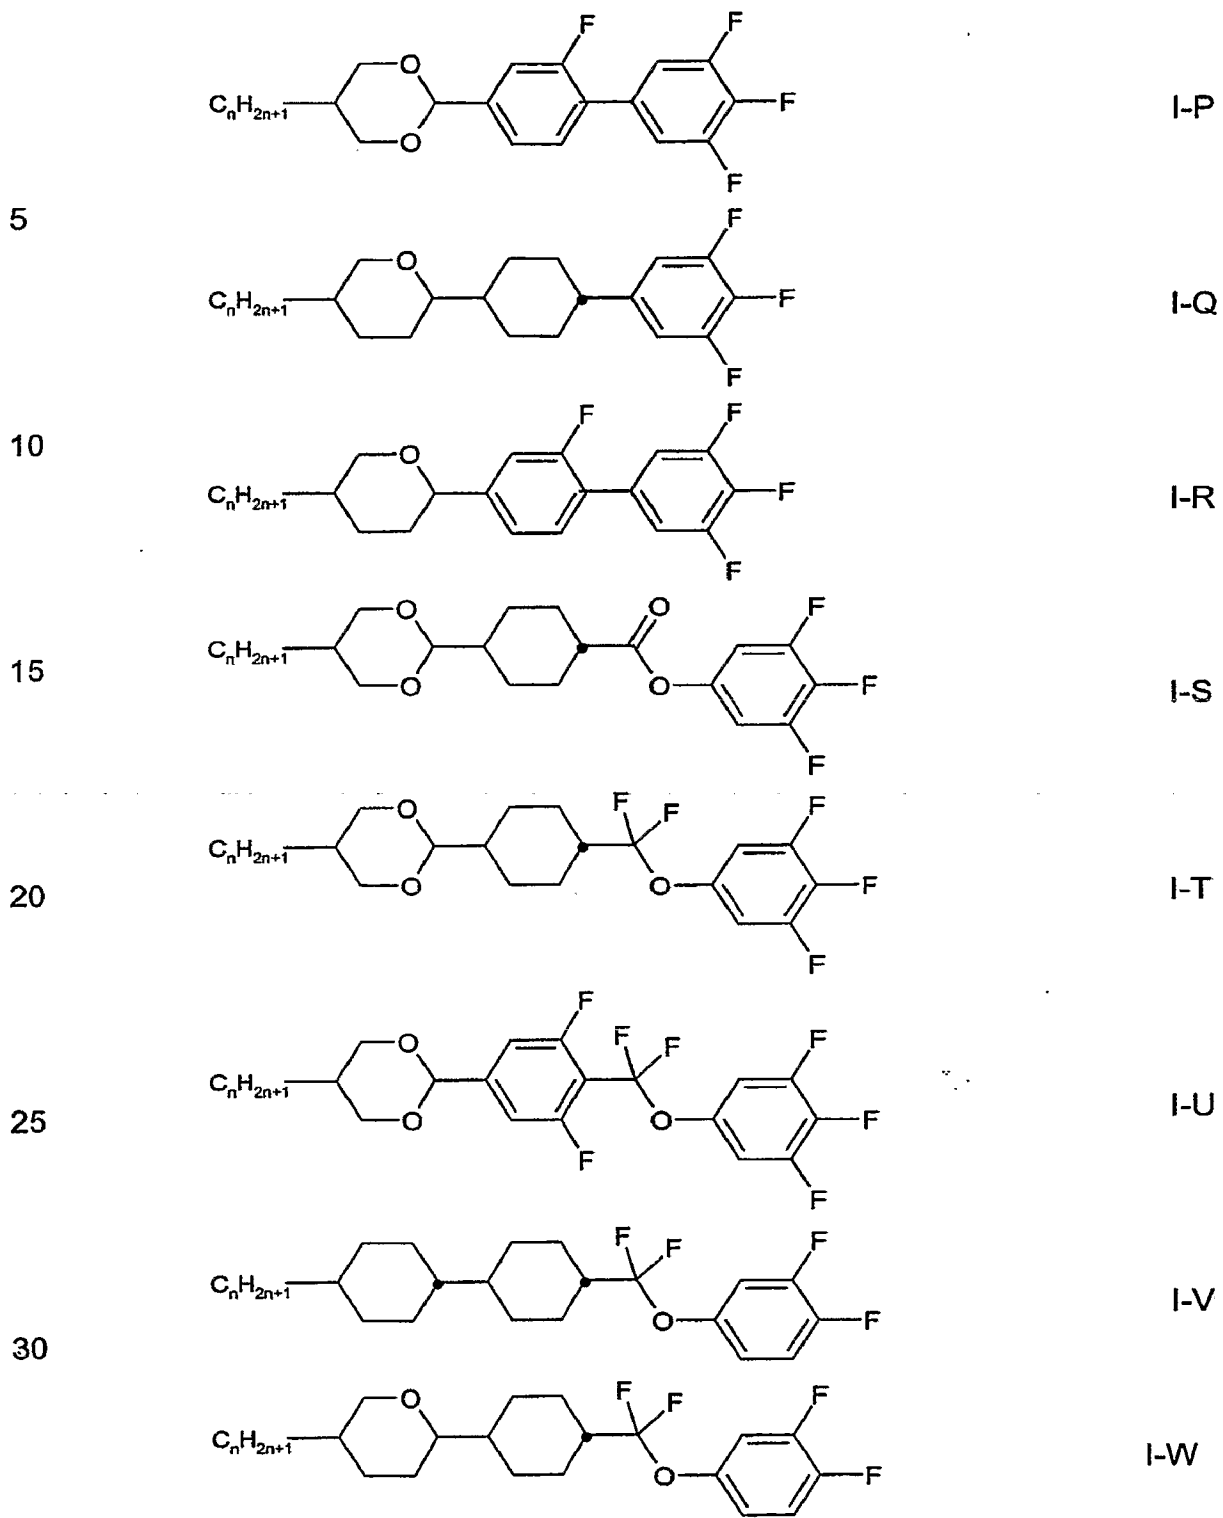

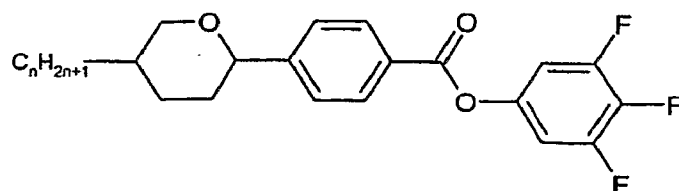


I-X

5

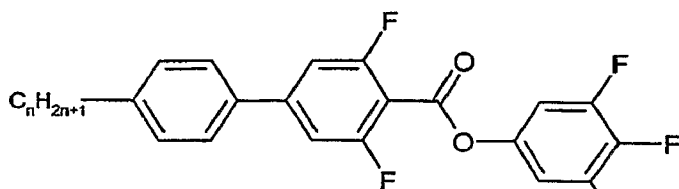

I-Y

10



I-Z

15

with n being 2, 3, 4, 5, 6 or 7 and C_nH_{2n+1} - being preferably a straight-chain radical.

With regard to compounds of formula II it is more preferred that

R^{21} is a C_1 to C_8 alkanyl, alkenyl or alkoxy radical unsubstituted or substituted with at least one F atom; especially an unsubstituted and straight-chain alkanyl or alkenyl radical with 2, 3, 4, 5, 6 or 7 carbon atoms;


20

L^{21} is H or F, especially F;


X^{21} is F or Cl, especially F;

25


Z^{21} , Z^{22} and Z^{23} are each a single bond, $-CF_2O-$ or $-CO-O-$ whereby at least two of Z^{21} , Z^{22} and Z^{23} are each a single bond;






30

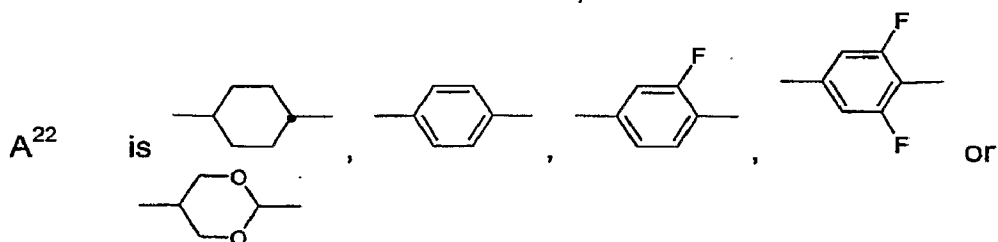

35

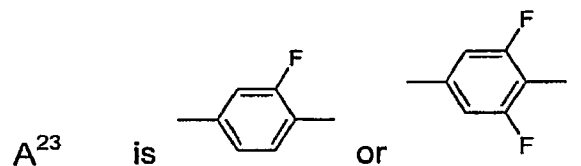

Preferred subformulas of formula II are inter alia:

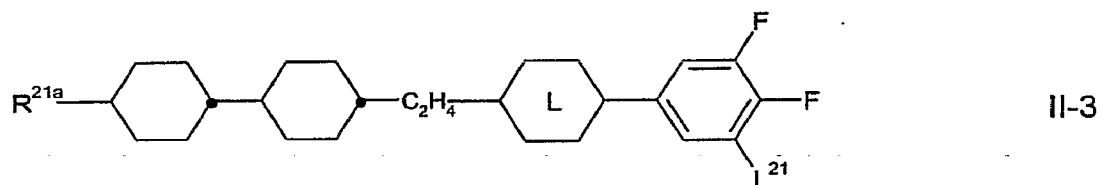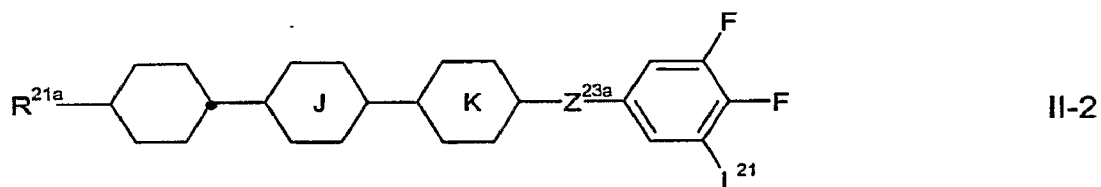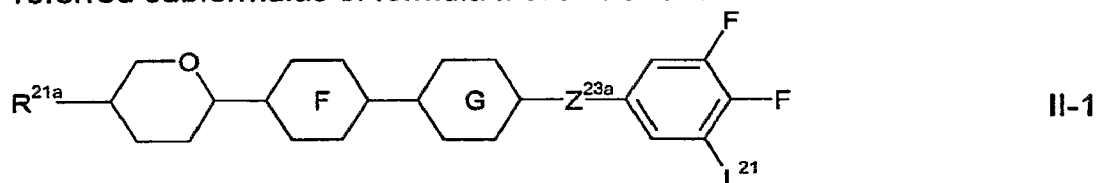

wherein

R^{21a} is defined as R^{21} for formula II above and preferably an unsubstituted and straight-chain or branched alkanyl, alkoxy or alkenyl radical with up to 8 carbon atoms;

Z^{23a} is a single bond, $-CF_2O-$ or $-CO-O-$;



L^{21} is H or F;




and






are independently of each other

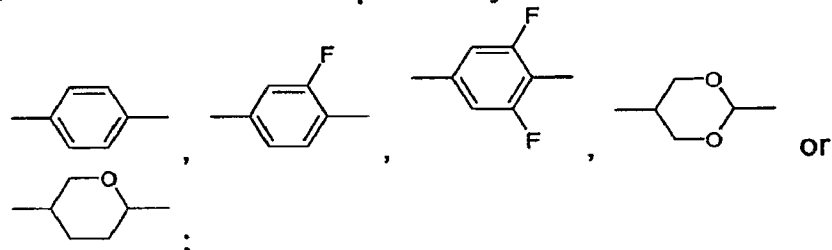


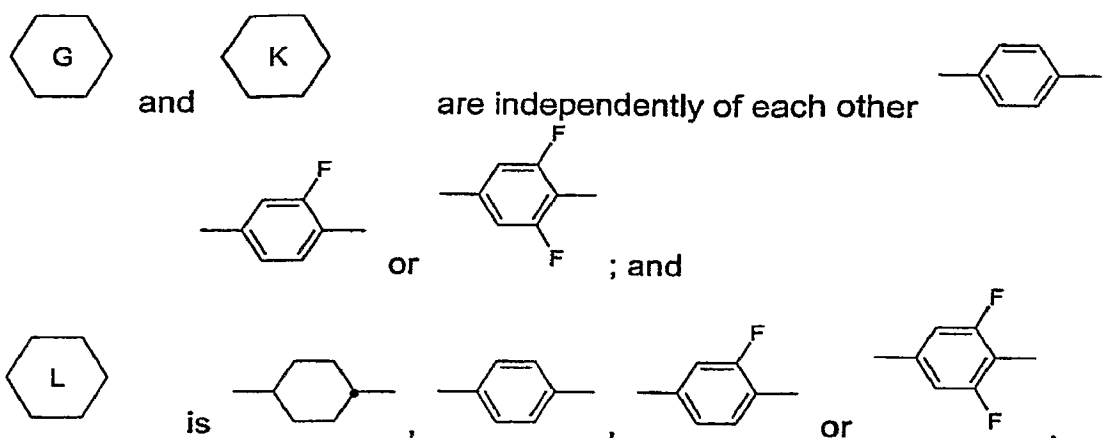


Preferably, compounds of formula II are selected from subformulas II-1 and II-2.

15 Some specific compounds of preferred compounds of formula II are the following ones:

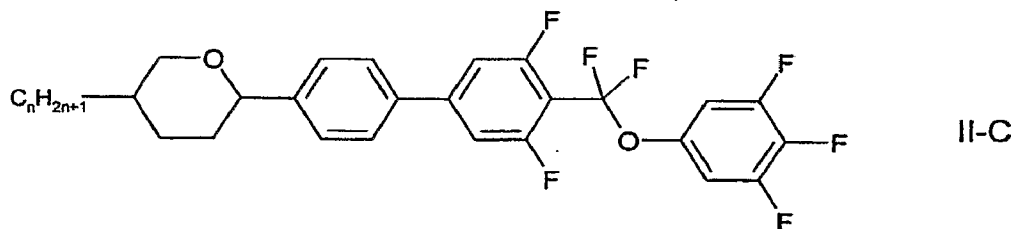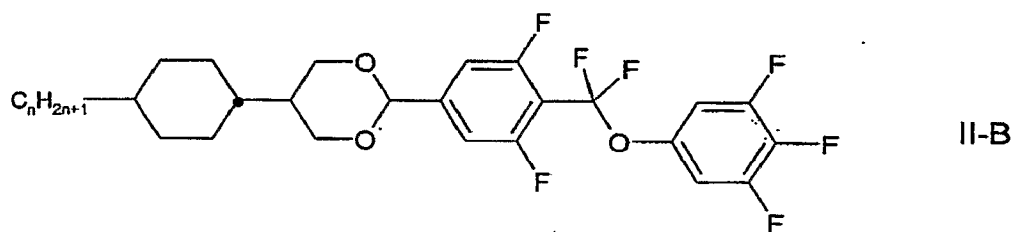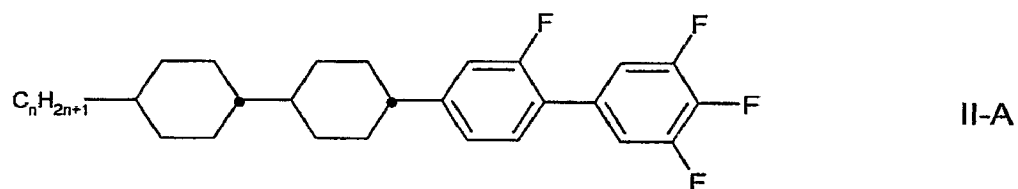

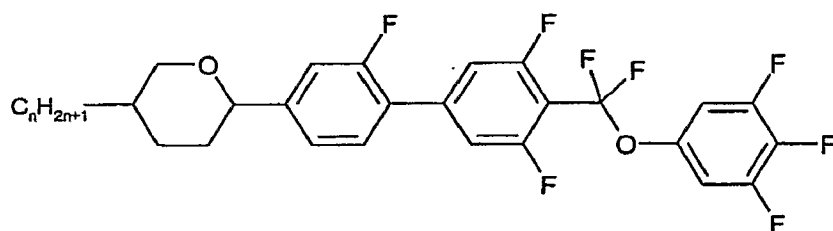


II-D

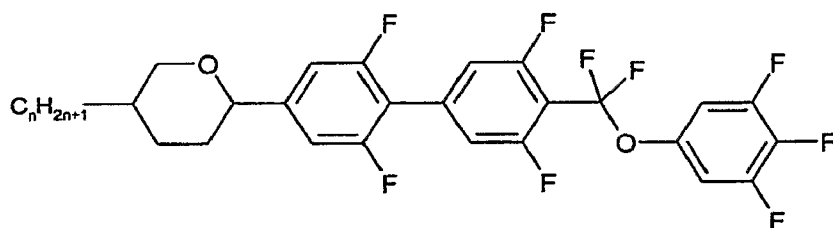


II-E

with n being 2, 3, 4, 5, 6 or 7 and C_nH_{2n+1} being preferably a straight-chain radical. It is especially preferred that n is 2, 3 and 5.


Some further compounds of formula II that may be comprised by component (π) of the liquid crystal composition according to the present invention are:

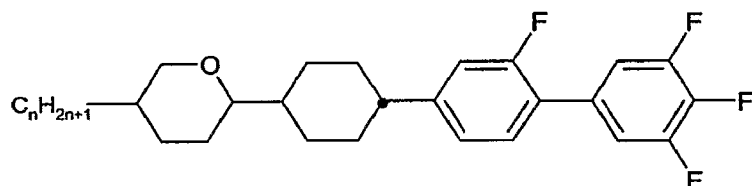


II-F

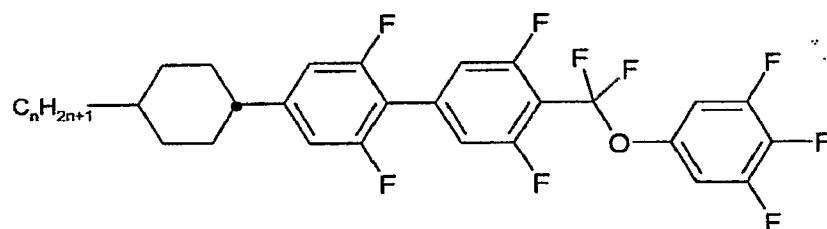


II-G

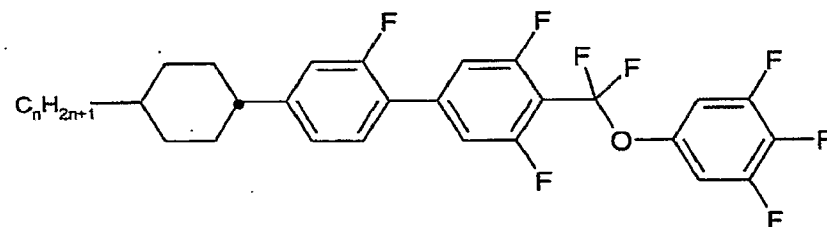

II-H

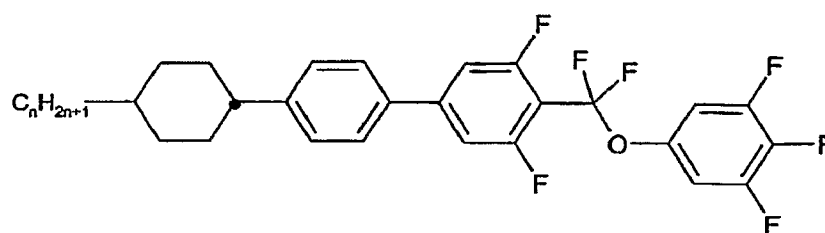

II-I

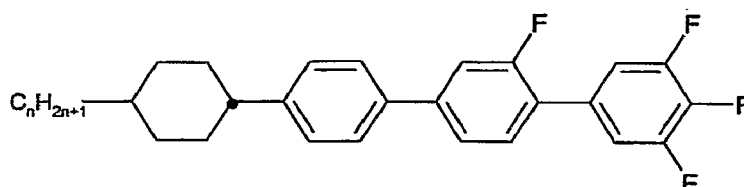


II-J

The component (π) of the liquid crystal composition of the instant invention may comprise only compounds of formula I above; in certain embodiments of the invention, however, it comprises only compounds of formula II above. In another group of embodiments of the invention it may comprise compounds of formula I as well as of formula II. In the latter case the weight ratio of compounds of formula I to compounds of formula II is from about 1:10 to about 10:1.


The liquid crystal composition for use in the bistable liquid crystal device according to the invention may comprise further mesogenic or liquid crystalline compounds known in the art. They may be present in order to adjust some of the composition's properties like viscosity, dielectric anisotropy, birefringence and nematic phase range. These compounds are not specifically limited as long as they do not impair the composition's properties with respect to its use in the bistable liquid crystal device.

Preferably, the liquid crystal composition of the present invention comprises one or more compounds of the following formulas:




III

5




IV




V

10



VI



VII

15



VIII

a and b are independently of each other 0 or 1;

20

$R^{31}, R^{32}, R^{41}, R^{42}, R^{51}, R^{52}, R^{61}, R^{62}, R^{71}, R^{72}, R^{81}$ and R^{82}

are independently of each other $\text{C}_1\text{-C}_{15}$ alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by $-\text{O}-$, $-\text{S}-$, $-\text{CH}=\text{CH}-$, $-\text{C}\equiv\text{C}-$, $-\text{CO}-\text{O}-$, $-\text{OC}-\text{O}-$ such that there are no hetero atoms adjacent to each other;

25


L^{31}

is H or F;

Z^{41}

is $-\text{CO}-\text{O}-$, $-\text{CH}_2\text{O}-$, $-\text{OCH}_2-$, $-\text{CF}_2\text{O}-$, $-\text{OCF}_2-$, $-\text{CH}_2\text{CH}_2-$, $-\text{CF}_2\text{CF}_2-$, $-\text{CH}_2\text{CF}_2-$, $-\text{CF}_2\text{CH}_2-$, $-\text{CH}=\text{CH}-$ or $-\text{C}\equiv\text{C}-$;


30



and


are

independently of each other




or

35




;

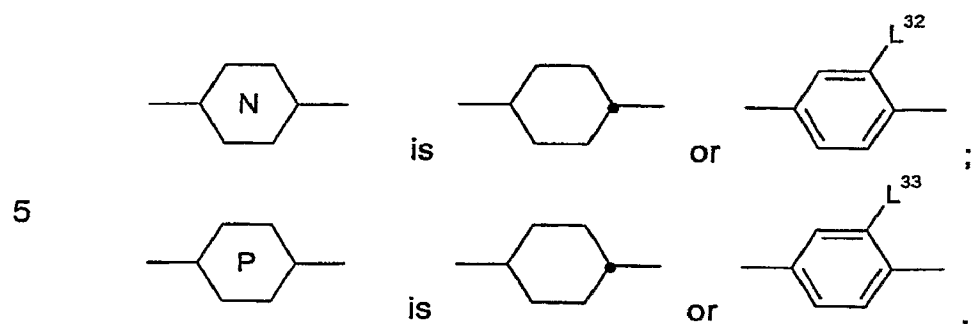


in which

L^{32} and L^{33} are independently of each other H or F.

10 With respect to formula III it is preferred that a is 1. Preferred compounds of formula III are of the following formulas:


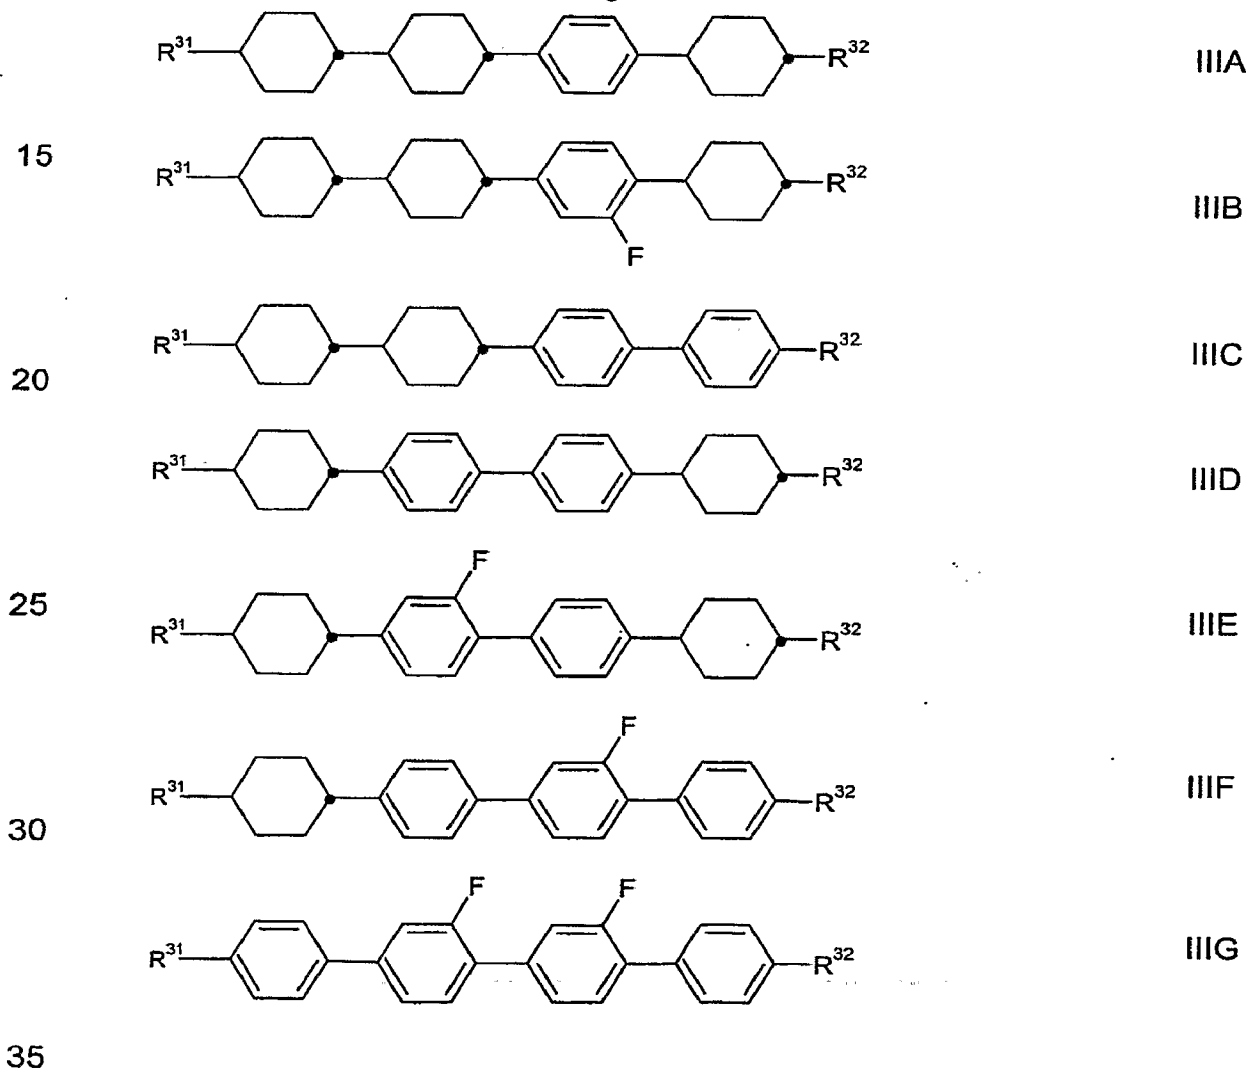


with R^{31} and R^{32} being as defined above. Preferably, in formulas III and IIIA to IIIG R^{31} and R^{32} are both independently of each other straight-chain alkyl, more preferred straight-chain alkanyl or alkenyl having 2, 3, 4, 5 or 6 carbon atoms, especially straight-chain alkanyl with 2 to 6 carbon atoms, a is 1 and L^{31} is H or F (for formula III). Highly preferred compounds are of formula IIID and IIIE. Especially preferred examples of formula III are compounds of formula III1 to III6:

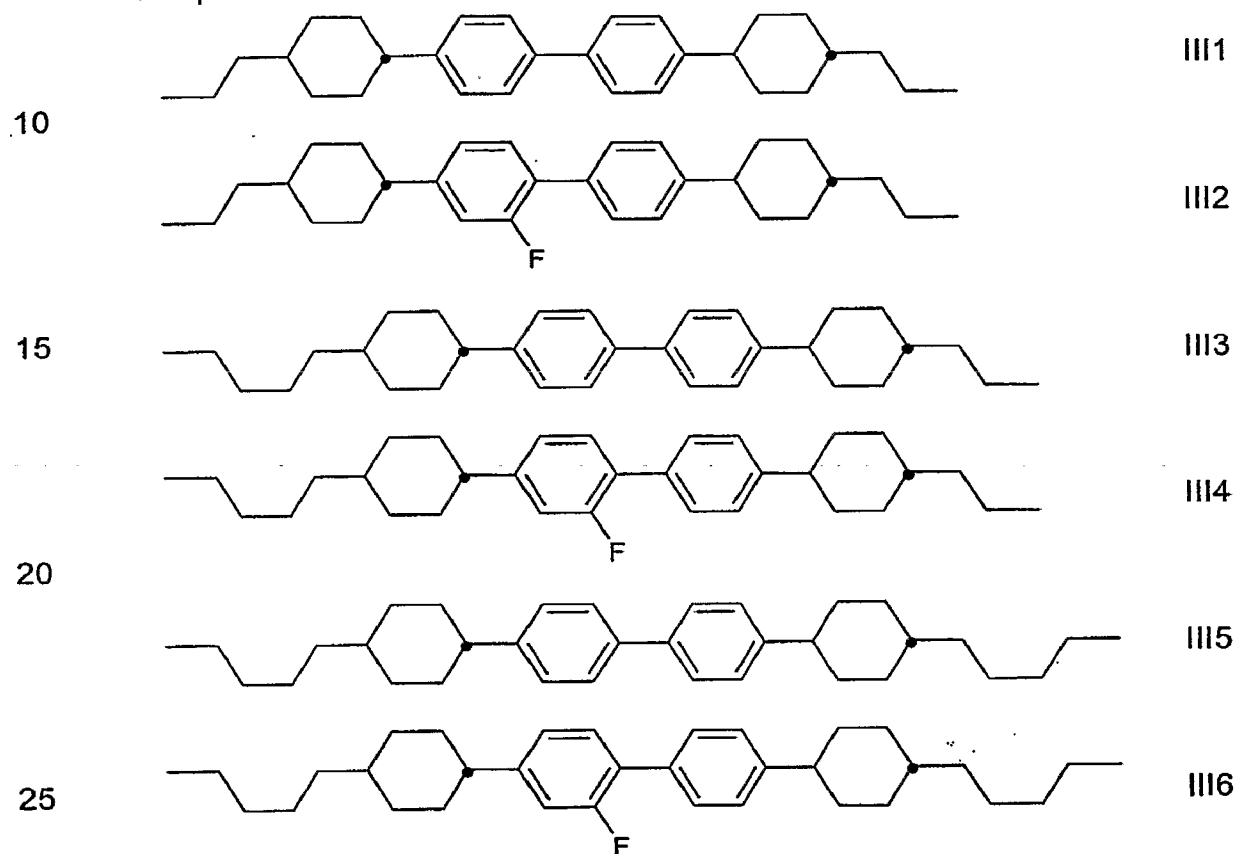





Most preferred compounds of formula III are compounds III2, III4 and III6, and it is especially preferred to have a mixture of all three compounds in the liquid crystal composition.

In some embodiments of the present invention it may also be preferred that a in formula III is zero. Then, preferred compounds of formula III are of the following formulas:

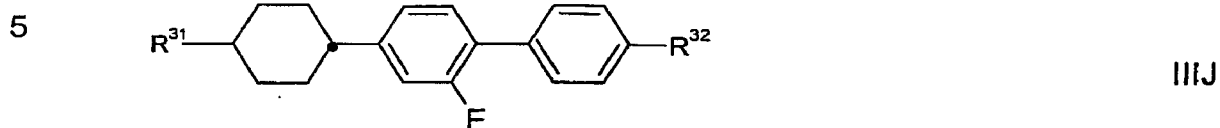


10
 whereby R^{31} and R^{32} are as defined above and preferably independently of each other straight-chain alkyl, more preferred straight-chain alkanyl or alkenyl having 2, 3, 4, 5 or 6 carbon atoms, even more preferred straight-chain alkanyl with 2 to 6 carbon atoms. Especially, R^{31} is n-propyl or n-pentyl and R^{32} is ethyl.

15
 Preferred compounds of formula IV are of the following compounds:



30
 with R^{41} , R^{42} and Z^{41} being as defined above; Z^{41} is preferably -CO-O- or, in case of formula IVD, -OCH₂-. R^{41} and R^{42} are both independently of each other straight-chain alkyl, more preferred straight-chain alkanyl or alkenyl having 2, 3, 4, 5 or 6 carbon atoms, especially straight-chain alkanyl with 2 to 6 carbon atoms. Compounds of formula IVB are more preferred. Especially preferred examples of formula IV are compounds of


35
 formulas IV1 to IV3 as well as of formulas IV4 and IV5 and of formulas IV6 to IV8:

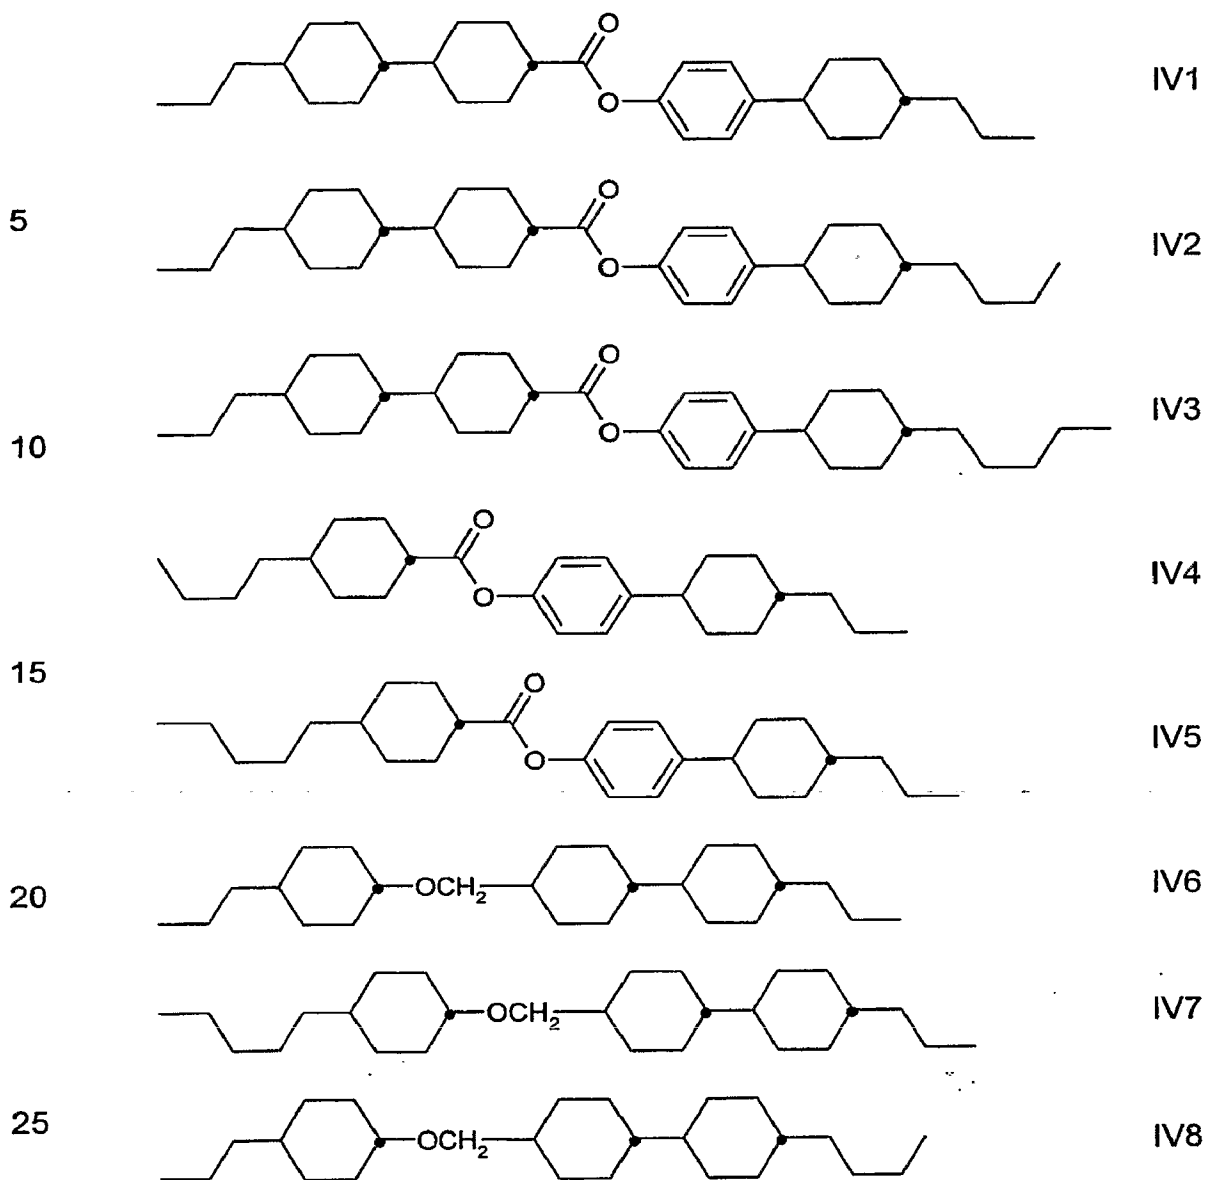

It is especially preferred to have a mixture of compounds IV1, IV2 and IV3 in the liquid crystal composition.


Preferably, in formula V above R^{51} is straight-chain alkyl, more preferred straight-chain alkanyl or alkenyl having 2, 3, 4, 5 or 6 carbon atoms, especially straight-chain alkanyl with 2 to 6 carbon atoms, and R^{52} is straight-chain alkyl or, more preferred, alkoxy having 1, 2, 3 or 4 carbon

atoms. Especially preferred examples of formula V are compounds of formula V1 to V6:

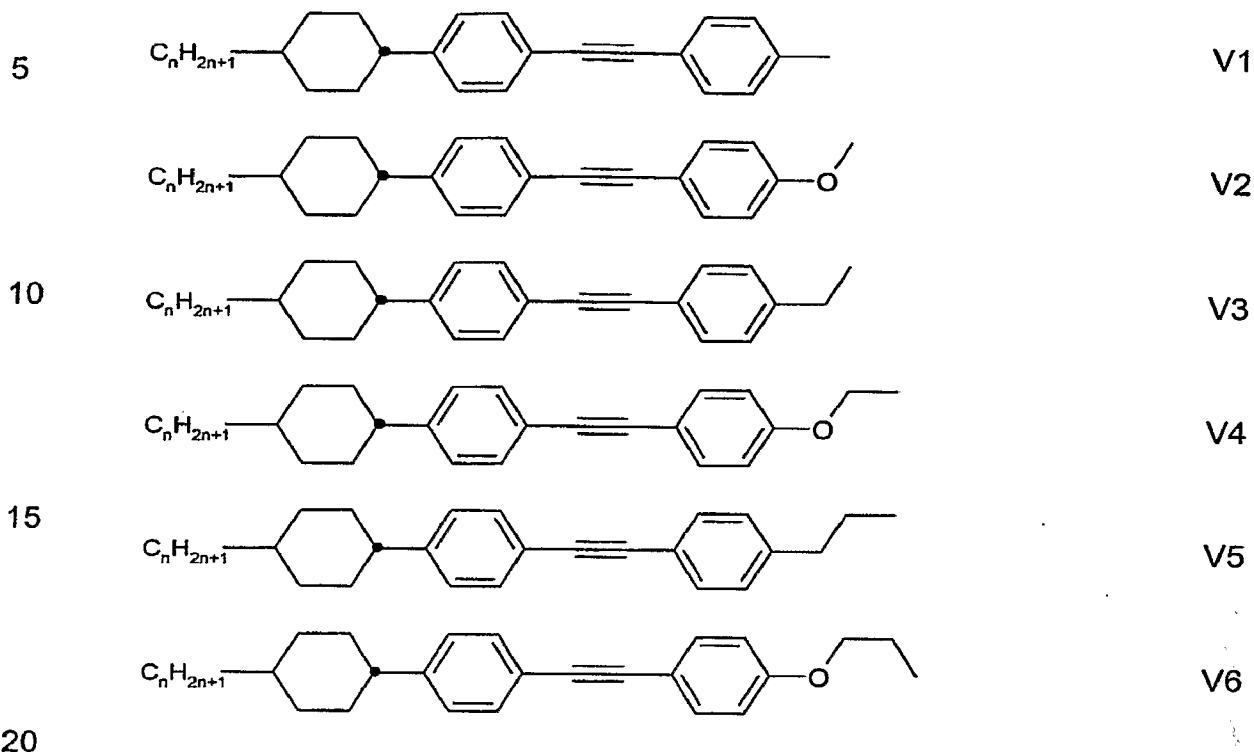


in which n is an integer from 1 to 6, preferably 2, 3 or 4, especially 3. Preferred compounds of formula V are compounds of formula V2, V4 and V6 with $n = 3$ (giving an n -propyl substituent). It is preferred to have a mixture of all three compounds V2, V4 and V6 in the liquid crystal composition.

Preferably, in formula VI above R^{61} is straight-chain alkanyl or alkenyl, especially with 2, 3, 4 or 5 carbon atoms, and R^{62} is straight-chain alkanyl or alkoxy both having 1, 2, 3, 4 or 5 carbon atoms. Especially preferred are compounds of formula VIA or VIB with $m = 2, 3, 4, 5$ and $n = 1, 2, 3, 4, 5$.



VIA


5



VIB


Preferred compounds of formula VI are compounds of formula VI1 to VI4:

10




VI1

15




VI2

20



VI3




VI4

25

Especially preferred are compounds of formula VI1, VI3 and VI4. They may be used alone or, more preferred, as a mixture of two or three compounds.


Regarding compounds of formula VII specific compounds are of the following formulas

30




VIIA


35



VIIB



VIIC




VIID


5

with R^{71} and R^{72} being as defined above. Preferably, R^{71} and R^{72} are straight-chain alkyl, especially alkanyl, with 1, 2, 3, 4, 5 or 6 carbon atoms. Preferred compounds of formula VII are:

10



VIIC1




VIID1


15

with n and m being independently of each other 1, 2, 3, 4, 5 or 6. Especially preferred examples of compounds of formula VII are

20




VII-1




VII-2

25



VII-3




VII-4



30

35







Regarding compounds of formula VIII specific compounds are of the following formulas




10 Preferably, in formula VIII R^{81} is straight-chain alkanyl or alkenyl, especially having 2, 3, 4 or 5 carbon atoms, and R^{82} is straight-chain alkanyl having 1, 2, 3, 4 or 5 carbon atoms (formula VIII A or VIIB with $m = 2, 3, 4, 5$, $n = 1, 2, 3, 4, 5$, and $p = 1, 2, 3, 4, 5$).




Especially preferred examples of compounds of formula VIII are





VIII-7



VIII-8


5

Compounds of formula III to VIII are usually used in the liquid crystal composition according to the invention in a total amount of up to 40 weight%, preferably in a total amount of 0 to about 20 weight%, more preferably in a total amount of about 2 to about 18 weight% and especially in a total amount of about 3 to about 15 weight%. Compounds of each formula III to VIII may be present in a single composition although it is preferred that compounds of only one, two or three different of these formulas are contained in a specific liquid crystal mixture of the present invention. For instance, in a specific composition there might be only compounds of formulas III and IV or of formulas V and VI and so on. It is, however, especially preferred that compounds of only one of these formulas III to VIII are present in a single specific composition according to the invention.


20

The liquid crystal composition according to the invention may also comprise compounds of the following formulas:

25



IX




X

30



XI



XII


35

in which



$R^{91}, R^{92}, R^{101}, R^{102}, R^{111}, R^{121}$ and R^{122}

are independently of each other C_1 - C_{15} alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by $-O-$, $-S-$, $-CH=CH-$, $-C\equiv C-$, $-CO-O-$, $-OC-O-$ such that there are no hetero atoms directly linked to each other; preferably these radicals are independently of each other straight-chain alkanyl, alkenyl or alkoxy radicals with up to 8 carbon atoms;




Y^{111} is C_1 - C_{15} alkanyl or C_2 - C_{15} alkenyl that are independently of each other mono- or poly-substituted with halogen, or C_1 - C_{15} alkoxy which is mono- or poly-substituted with halogen; preferably it is an alkanyl or an alkoxy radical with up to 8 carbon atoms in which each of the hydrogen atoms are replaced by F; and




independently of each other



Preferred compounds of formula IX are compounds of the following formulas:




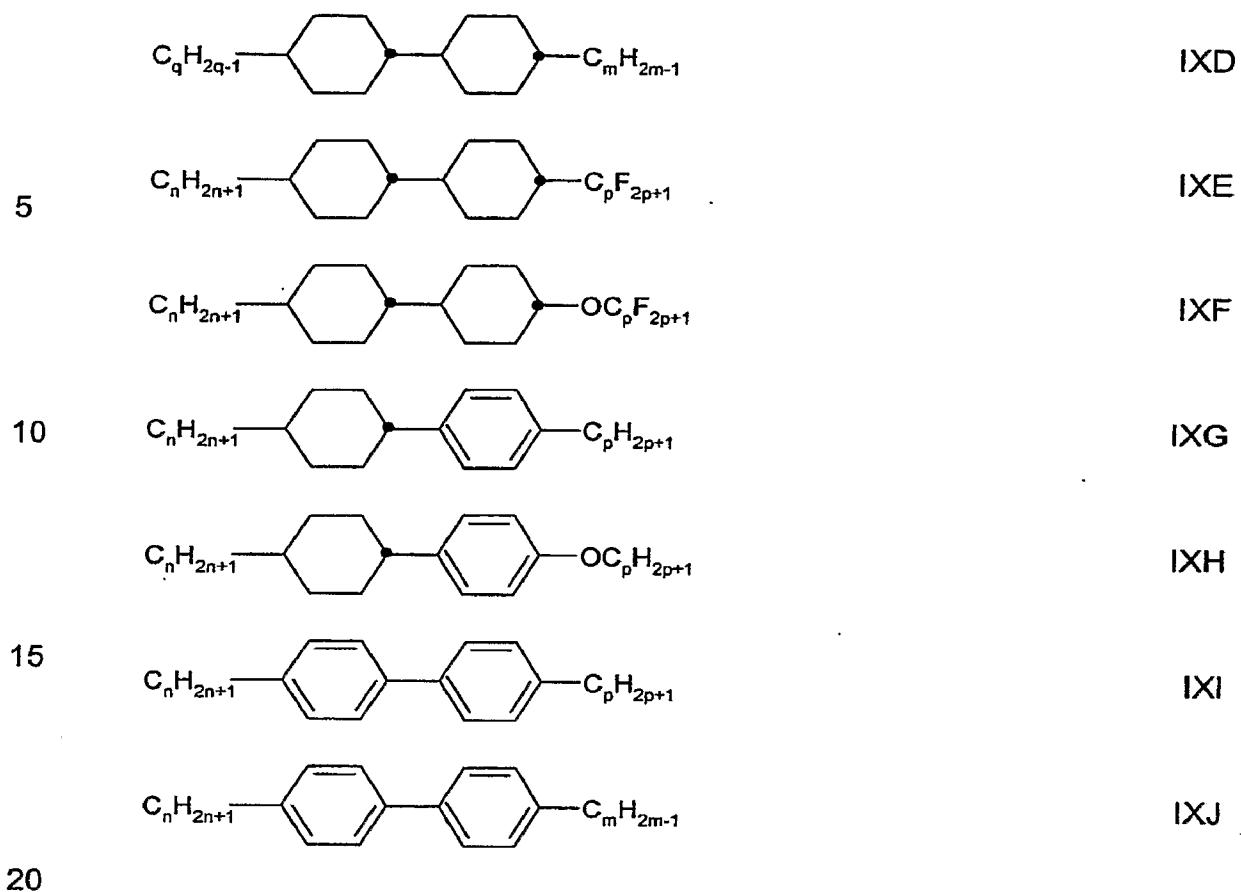


in which n and p are independently of each other an integer from 1 to 8, preferably 2, 3, 4, 5 or 6, and m and q are independently of each other an integer from 2 to 8, preferably 2, 3, 4, 5 or 6.

25


Preferred examples of compounds of formula IX are:

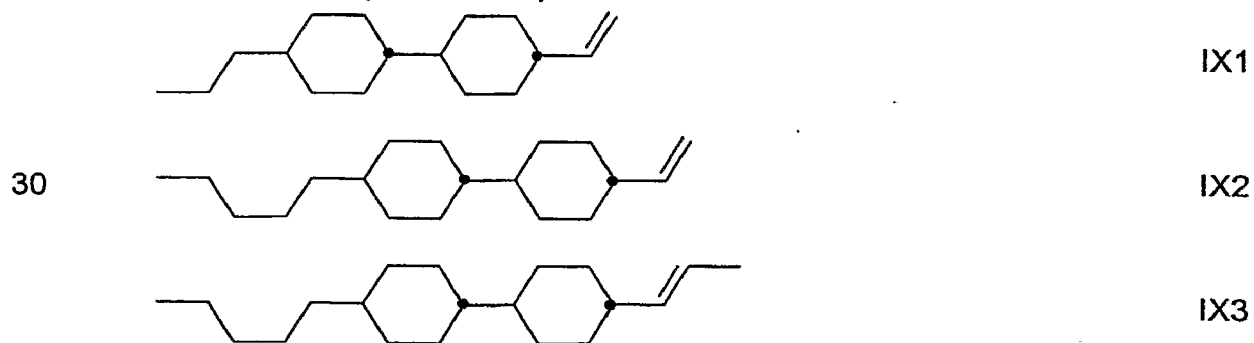

35




IX4



IX5

5

Preferred compounds of formula X are compounds of the following formulas:




XA




XB

15


with n being 1, 2, 3, 4, 5, 6, 7 or 8 and p being 1, 2, 3, 4, 5 or 6. Preferred examples of compounds of formula X are the following compounds:




X1




X2




X3



X4





X5







X6

35

Preferred compounds of formula XI are compounds of the following formulas:






10 with n being 1, 2, 3, 4, 5 or 6, m being 2, 3, 4, 5 or 6, and Y¹¹¹ being preferably selected from CF₃ and OCF₃. Preferred compounds of formula XI are the following compounds:



25


Preferred compounds of formula XII are compounds of the following formulas:

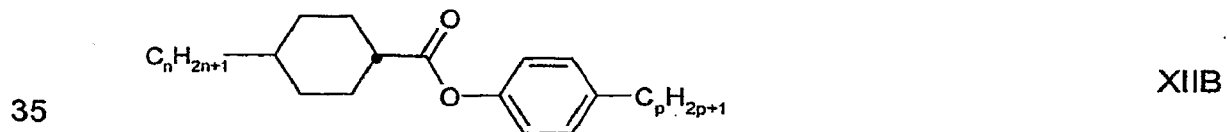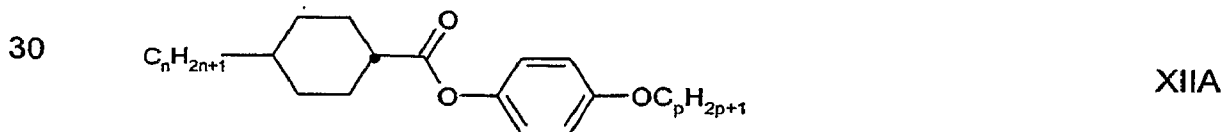




XIIC

5




XIID

10



XIIE




XIIF

15


with n being 1, 2, 3, 4, 5 or 6 and p being 1, 2, 3, 4, 5 or 6. Specific examples of compounds of formula XII are the following compounds:

20




XII1

25




XII2

30




XII3




XII4

35




XII5

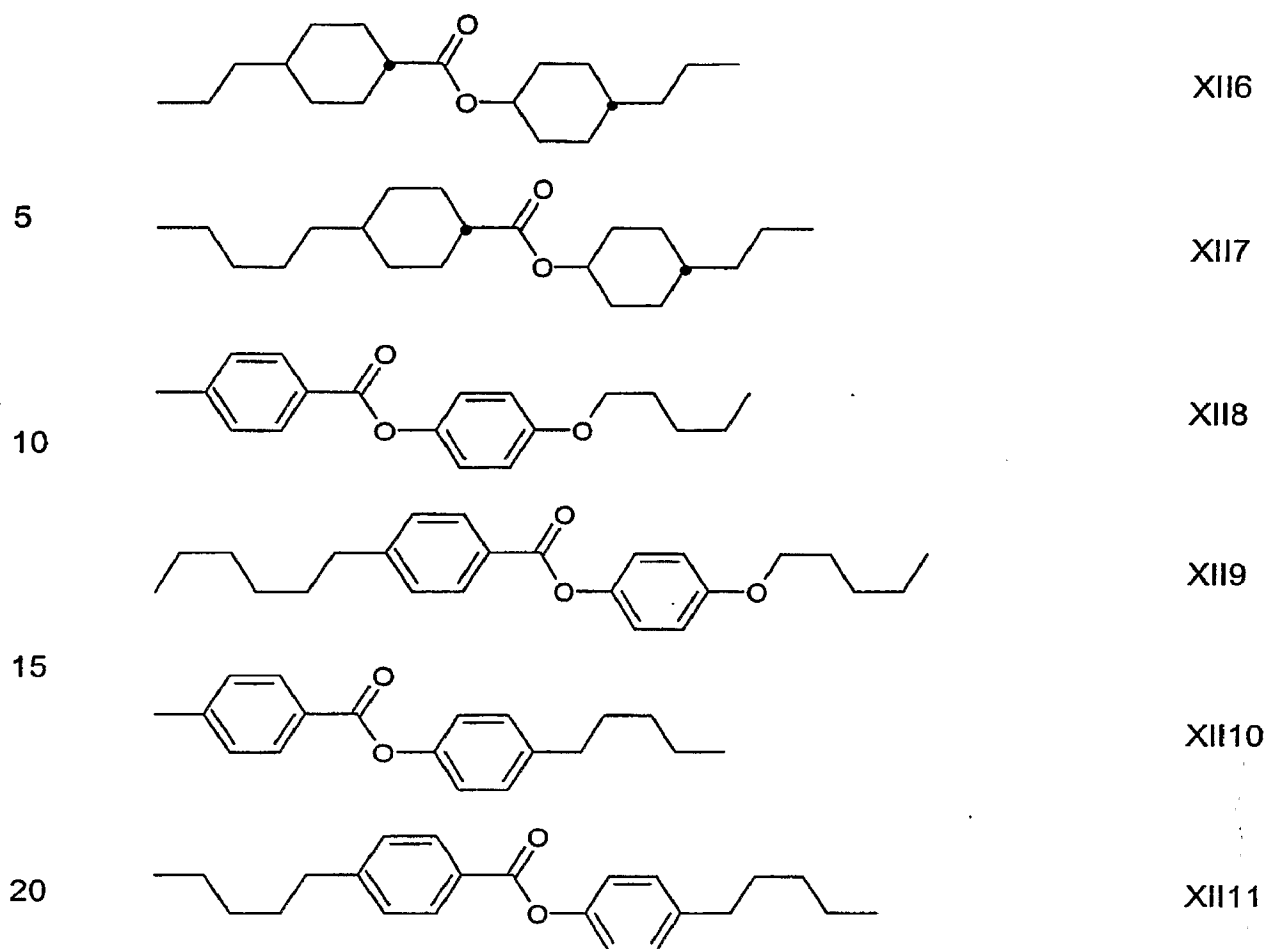

Compounds of formula IX to XII are usually used in the liquid crystal composition according to the invention in a total amount of up to 40 weight%, preferably in a total amount of 0 to about 20 weight%, more preferably in a total amount of about 2 to about 18 weight% and especially in a total amount of about 3 to about 15 weight%. Compounds of each formula IX to XII may be present in a single composition although it is preferred that compounds of only one, two or three different of these formulas are contained in a specific liquid crystal mixture of the present invention. For instance, in a specific composition there might be only compounds of formulas IX and X or of formulas XI and XII and so on. It is, however, especially preferred that compounds of only one of these formulas IX to XII are present in a single specific composition according to the invention.

The liquid crystal composition according to the invention may also comprise compounds of the following formulas:

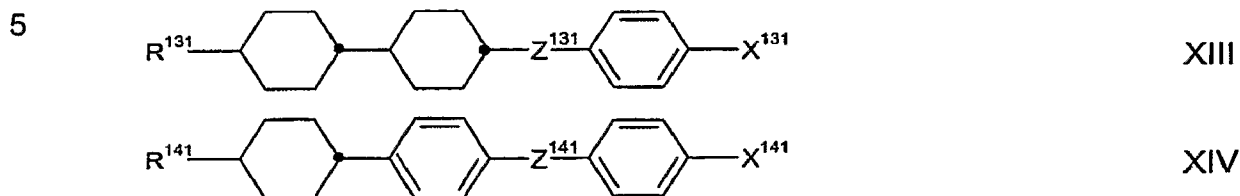

10

in which

R^{131} and R^{141} are independently of each other C_1 - C_{15} alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by $-O-$, $-S-$, $-CH=CH-$, $-C\equiv C-$, $-CO-O-$, $-OC-O-$ such that there are no hetero atoms directly linked to each other; preferably these radicals are independently of each other straight-chain alkanyl, alkenyl or alkoxy radicals with up to 8 carbon atoms;


15


X^{131} and X^{141} are independently of each other F or Cl, preferably F; and Z^{131} and Z^{141} are independently of each other a single bond, $-CF_2O-$ or $-CO-O-$, preferably a single bond.

20

Preferred compounds of formula XIII are compounds of the following formulas:

25

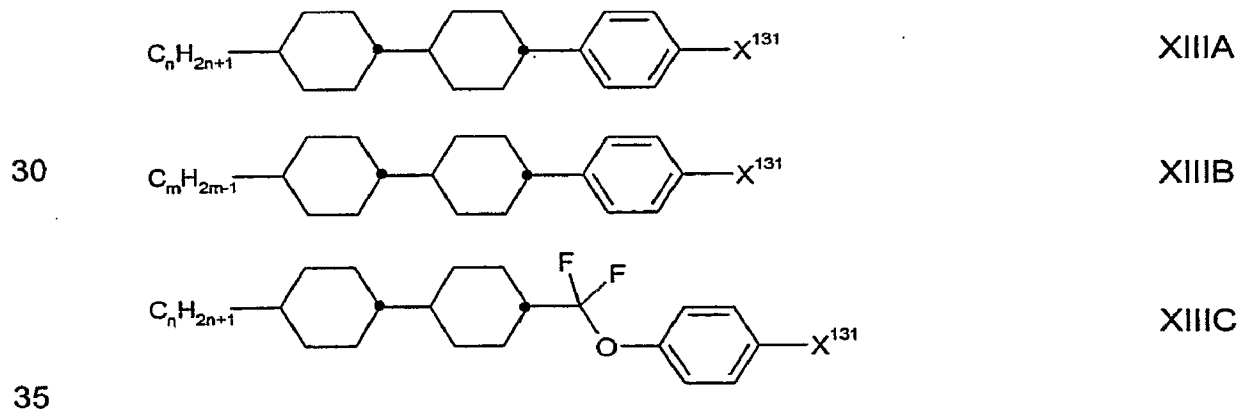




XIII D


5

with n being 1, 2, 3, 4, 5, 6, 7 or 8, preferably 2, 3, 4, 5, m being 2, 3, 4, 5, 6, 7, 8, preferably 2, 3, 4, 5, and X^{131} being F or Cl, preferably F. Preferred examples of formula XIII are the following compounds:

10




XIII-1



XIII-2


15



XIII-3


20

Preferred compounds of formula XIV are compounds of the following formulas:




XIV A

25




XIV B

30






XIV C



XIV D

35

with n being 1, 2, 3, 4, 5, 6, 7 or 8, preferably 2, 3, 4, 5, m being 2, 3, 4, 5, 6, 7, 8, preferably 2, 3, 4, 5, and X^{131} being F or Cl, preferably F. Preferred examples of formula XIII are the following compounds:

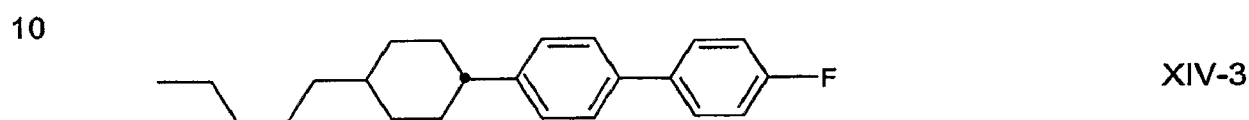

15 Compounds of formulas XIII and XIV are usually used in the liquid crystal composition according to the invention in a total amount of 0 to about 40 weight%, preferably in a total amount of up to 20 weight% and more preferably in a total amount of up to 10 weight%. Compounds of each formula XIII and XIV may be present in a single composition although it is preferred that compounds of only one of these formulas are contained in a
20 specific liquid crystal mixture of the present invention.

A specific liquid crystal composition for use in a bistable liquid crystal device may comprise compounds selected from formulas III to VIII (which are, for the sake of simplicity, denoted hereinafter as "Group A") and
25 compounds selected from formulas IX to XII (which are, for the sake of simplicity, denoted hereinafter as "Group B") and compounds selected from formulas XIII and XIV (which are, for the sake of simplicity, denoted hereinafter as "Group C") at the same time. However, this is not specifically required and in some cases it is even preferred that a specific
30 mixture according to the present invention may comprise only compounds of one or two of the Groups A, B and C. It is more preferred that the liquid crystal composition of the invention comprises compounds of Group A and/or Group B.

35 The liquid crystal composition for use in a bistable liquid crystal device according to the invention may optionally contain one or more further

additives known to the skilled person and described in literature. Examples of those further additives are stabilizers, chiral dopants and pleochromatic dyes. If used, they are contained in usual concentrations. The total concentration of said further additives is in the range from 0 to 15 weight%, preferably in the range from 0.1 to 10 weight%, especially preferred not more than 6 weight%, based on the total weight of the composition. The concentration of each single additive is usually in the range from 0.1 to 3 weight%, if present. The concentration of said further additives and likewise constituents of the liquid crystal composition are not taken into account for the specification of the concentration of the other compounds comprised in the liquid crystal composition. As chiral dopants for example cholesterylnonanoate (CN), R/S-811, R/S-1011 and R/S-2011 or CB15 (Merck KGaA, Darmstadt, Germany) may be used.

It will be acknowledged by those skilled in the art that the liquid crystal composition for the use according to the invention may also comprise further (mesogenic) compounds besides those disclosed in more detail in this specification. A wide variety of mesogenic compounds may be used as long as they are not detrimental to the set of parameters important for the use of the bistable liquid crystal composition according to the invention.

All the compounds used in the liquid crystal composition of the bistable liquid crystal devices are either commercially available or can be readily prepared by methods known to those skilled in the art and as described in the standard text books of organic synthesis, for instance, in Houben-Weyl, *Methoden der Organischen Chemie*, Georg-Thieme-Verlag, Stuttgart. The liquid crystal composition will be prepared by applying standard protocols and techniques. In general, the desired amount of the minor component(s) will be dissolved in the major component, usually under elevated temperature. Alternatively, solutions of components in organic solvents like acetone, chloroform or methanol, can be mixed and afterwards the solvent(s) can be removed, e.g., by distillation. Likewise, manufacturing of the bistable devices according to the invention will follow standard techniques known to the artisan.

In the context of the present invention and with respect to the compounds contained in the liquid crystal composition for use in bistable liquid crystal devices and especially in zenithal bistable nematic devices of the invention the term "alkyl" means - as long as it is not defined in a different manner elsewhere in this description or the claims - straight-chain and branched hydrocarbon (aliphatic) radicals with 1 to 15 carbon atoms; the hydrocarbon radicals may be unsubstituted or substituted with one or more substituents being independently selected from the group consisting of F, Cl, Br, or I. This subclass of "alkyl" containing aliphatic saturated radicals may also be designated as "alkanyl". Furthermore, "alkyl" is also meant to comprise unsubstituted or likewise substituted hydrocarbon radicals in which one or more of the CH₂ groups are such replaced by -O- ("alkoxy", "oxaalkyl"), -S- ("thioalkyl"), -CH=CH- ("alkenyl"), -C≡C- ("alkynyl"), -CO-O- or -O-CO- that there are no hetero atoms (O, S) linked directly to each other. Preferably, alkyl is a straight-chain or branched saturated hydrocarbon having 1, 2, 3, 4, 5, 6, 7 or 8 carbon atoms and being unsubstituted or mono- or poly-substituted with F. More preferably, alkyl is meant to be methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl, t-butyl, n-pentyl, neopentyl, n-hexyl, n-heptyl, n-octyl; CF₃, CHF₂, CH₂F; CF₂CF₃. Most preferably, alkyl is a straight-chain hydrocarbon of up to 8 carbon atoms.

Since one or more CH₂ groups of an alkyl radical may be replaced by -O- as described above, the term "alkyl" also comprises "alkoxy" and "oxaalkyl" moieties. "Alkoxy" means "O-alkyl" in which the oxygen atom is directly linked to the group or ring being substituted with alkoxy and alkyl is defined as above. In particular, "alkyl" in "O-alkyl" means methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl, t-butyl, n-pentyl, neopentyl, n-hexyl, n-heptyl or n-octyl, whereby alkyl is optionally substituted with F. Most preferably, alkoxy is -OCH₃, -OC₂H₅, -O-n-C₃H₇, -O-n-C₄H₉, -O-t-C₄H₉, -OCF₃, -OCHF₂, -OCHF or -OCHFCHF₂. In the context of the present invention the term "oxaalkyl" comprises alkyl moieties in which at least one non-terminal CH₂ group is replaced by O in such a way that there are no adjacent oxygen atoms. Preferably, oxaalkyl comprises straight-chain radicals of the formula C_tH_{2t+1}-O-(CH₂)_u- in which t and u are independently of each other 1, 2, 3, 4, 5 or 6; especially t is 1 or 2 and u is an integer from 1 to 6.

If one or more of the CH_2 groups of alkyl are replaced by sulphur a "thioalkyl" radical is obtained. Thioalkyl comprises alkyl moieties in which at least one terminal or non-terminal CH_2 group is replaced by S (sulphur) in such a way that there are no adjacent sulphur atoms. Preferably, thioalkyl comprises straight-chain radicals of the formula $\text{C}_t\text{H}_{2t+1}\text{-S-(CH}_2)_u\text{-}$ in which t is 1, 2, 3, 4, 5 or 6 and u is 0, 1, 2, 3, 4, 5 or 6; especially t is 1 or 2 and u is zero or an integer from 1 to 6.

In the context of the present invention the term "alkenyl" means an alkyl radical in which one or more -CH=CH- moieties are present. When two -CH=CH- moieties are present the radical may also be designated as "alkadienyl". An alkenyl radical may comprise 2 to 15 carbon atoms and may be straight-chain or branched. It can be unsubstituted or mono- or polysubstituted with F, Cl, Br, or I; one or more of its CH_2 groups may be replaced independently of each other by -O- , -S- , $\text{-C}\equiv\text{C-}$, -CO-O- , -OC-O- such that there are no hetero atoms linked directly to each other. If the alkenyl CH=CH moiety is not a terminal $\text{CH}_2=\text{CH-}$ group it may exist in two configurations, namely the E-isomer and the Z-isomer. In general, the E-isomer (trans) is preferred. Preferably, alkenyl contains 2, 3, 4, 5, 6 or 7 carbon atoms and means vinyl, 1E-propenyl, 1E-butenyl, 1E-pentenyl, 1E-hexenyl, 1E-heptenyl, 2-propenyl, 2E-butenyl, 2E-pentenyl, 2E-hexenyl, 2E-heptenyl, 3-butenyl, 3E-pentenyl, 3E-hexenyl, 3E-heptenyl, 4-pentenyl, 4Z-hexenyl, 4E-hexenyl, 4Z-heptenyl, 5-hexenyl and 6-heptenyl. More preferred alkenyl is vinyl, 1E-propenyl, 3E-butenyl.

In the case one or more CH_2 alkyl groups are replaced by $\text{-C}\equiv\text{C-}$ an alkynyl radical is obtained. Also the replacement of one or more CH_2 alkyl groups by -CO-O- or -O-CO- is possible. The following of these radicals are preferred: acetyloxy, propionyloxy, butyryloxy, pentanoyloxy, hexanoyloxy, acetyloxymethyl, propionyloxymethyl, butyryloxymethyl, pentanoyloxymethyl, 2-acetyloxyethyl, 2-propionyloxyethyl, 2-butyryloxyethyl, 2-acetyloxypropyl, 3-propionyloxypropyl, 4-acetyloxybutyl, methoxycarbonyl, ethoxycarbonyl, propoxycarbonyl, butoxycarbonyl, pentoxycarbonyl, methoxycarbonylmethyl, ethoxycarbonylmethyl, propoxycarbonylmethyl, butoxycarbonylmethyl, 2-(methoxycarbonyl)ethyl,

2-(ethoxycarbonyl)ethyl, 2-(propoxycarbonyl)-ethyl, 3-(methoxycarbonyl)-propyl, 3-(ethoxy-carbonyl)-propyl oder 4-(methoxycarbonyl)-butyl.

5 For the purpose of this invention the term "halogen" comprises fluorine (F), chlorine (Cl), bromine (Br) and/or iodine (I).

In the context of the present invention halogen substituted radicals like, for instance, halogen substituted alkyl, alkanyl, alkoxy and alkenyl radicals may also be designated as "halogenalkyl", "halogenalkanyl",
10 "halogenalkoxy" and "halogenalkenyl", respectively. For instance, if halogen is F, a fluor substituted alkyl may be designated as "fluoroalkyl". The term "perhalogen", e.g. "perfluoro" designates a radical in which all of the hydrogen substituents of the radical are replaced by halogen, e.g. fluor. If only some of the hydrogens atoms are replaced by halogen, it is
15 preferred that they are replaced at the ω -position of that radical like, for example, in $-\text{CH}_2\text{CF}_3$.

In the present description and the following examples the structures of the mesogenic compounds disclosed are described by using acronyms. Said
20 acronyms can be transformed into chemical formulas according to Tables A and B. In these tables, radicals $\text{C}_n\text{H}_{2n+1}$ and $\text{C}_m\text{H}_{2m+1}$ are straight-chain alkyl radicals having n and m carbon atoms, respectively. Alkenyl radicals have the trans configuration. The codes according to Table B are self-evident. In Table A, only the acronym for the parent structure is given. In
25 individual cases, the acronym for the parent structure is followed, usually separated by a hyphen, by a code for the substituents R^1 , R^2 , L^1 and L^2 as given below:



30

35



	Code of R ¹ , R ² , L ¹ , L ²	R ¹	R ²	L ¹	L ²
5	n	C _n H _{2n+1}	CN	H	H
	nm	C _n H _{2n+1}	C _m H _{2m+1}	H	H
	nOm	C _n H _{2n+1}	OC _m H _{2m+1}	H	H
	nF	C _n H _{2n+1}	F	H	H
10	nN.F	C _n H _{2n+1}	CN	F	H
	nN.F.F	C _n H _{2n+1}	CN	F	F

Table A:

15

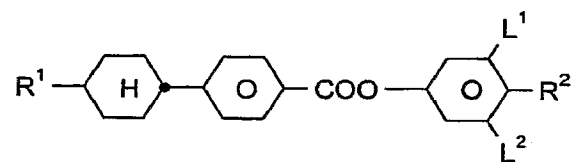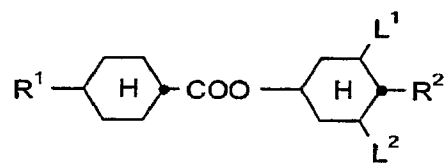



20

OS**HP**

25







CH**CCPC**

30







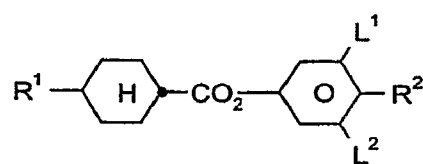

**PCH****D**

35


Table B:

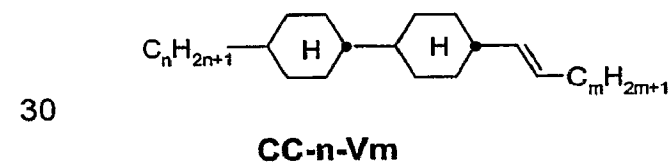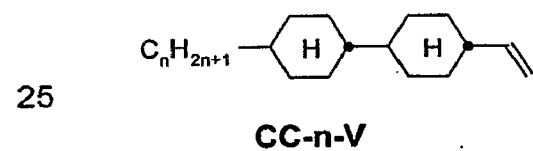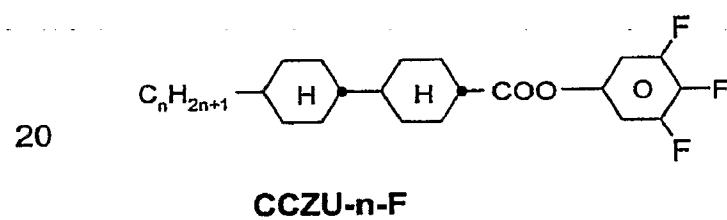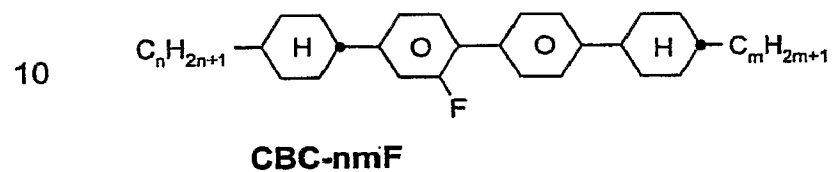


35

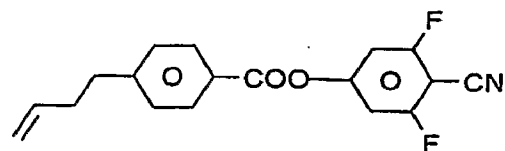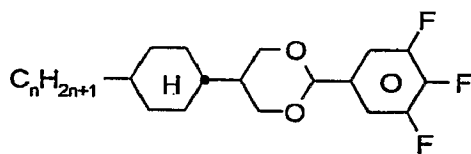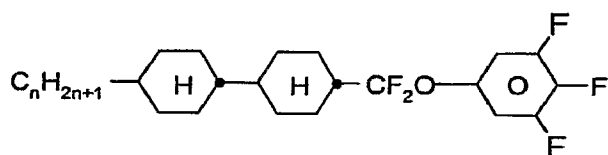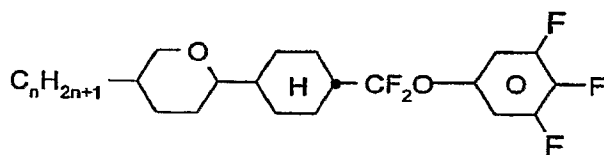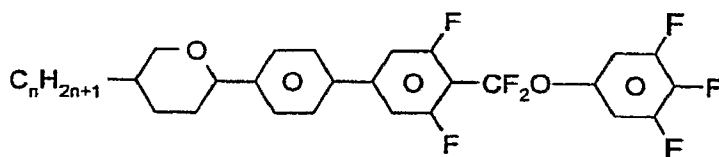**CCP-n-OCF3****PZU-V2-N****CDU-n-F****CCQU-n-F****CGZP-n-OT****CCOC-n-m****ACQU-n-F****APUQU-n-F**


5

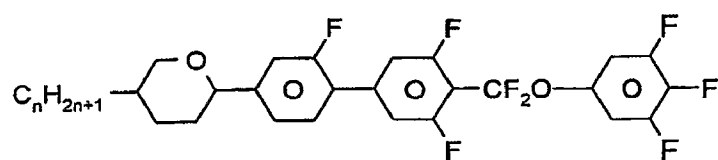**AGUQU-n-F**



10

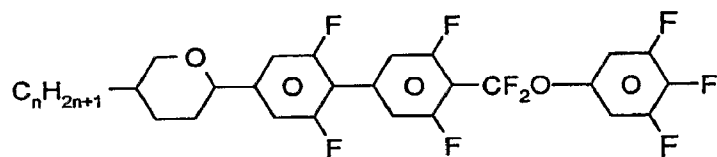**AUUQU-n-F**


15

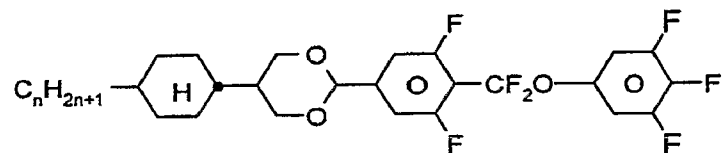**CDUQU-n-F**


20

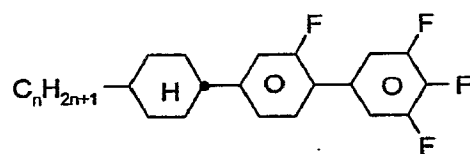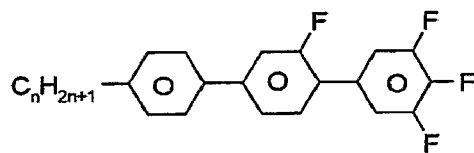**CGU-n-F****PGU-n-F**


25

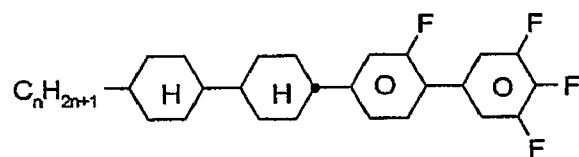**CCGU-n-F**



30

**PP-1-2V1**



35

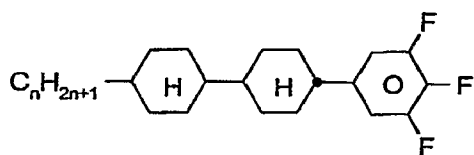



5

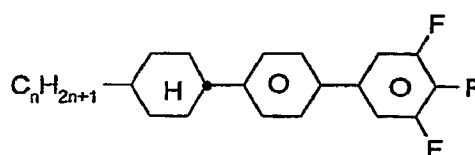CCP-nF.F.F**BCH-nF.F.F**

10

BCH-nF.F**CCG-V-F**

15

ECCP-nF.F**PGIGI-n-F**

20

CCQG-n-F

25


30

35


Table C:

Table C shows dopants optionally present in the liquid crystal compositions for use in the zenithal bistable nematic devices of the invention.


5

**C 15**


10

**CB 15**


15

**CM 21**


20

**R/S-811**


25

**CM 44**


30

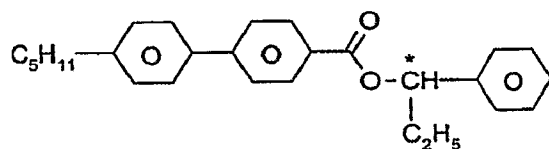**CM 45**


35

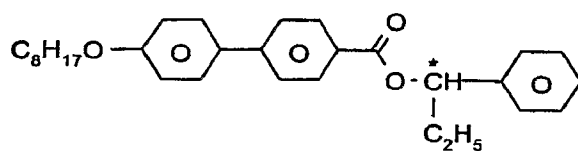**CM 47**


5

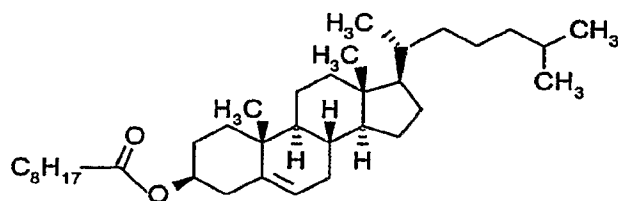**CN**


10

**R/S-2011**


15

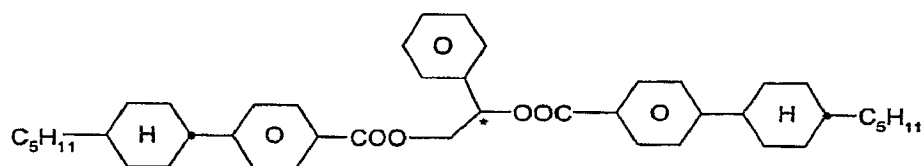**R/S-1011**

20

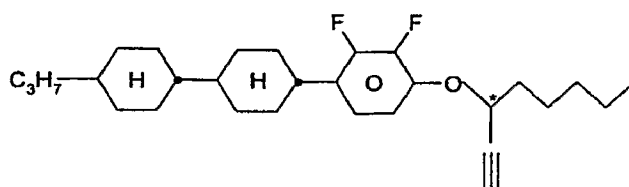**R/S-3011**

25



30



35

Table D:



Table D shows stabilizers optionally present in the liquid crystal compositions for use in the zenithal bistable nematic devices of the invention.

5



10

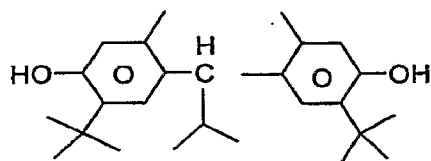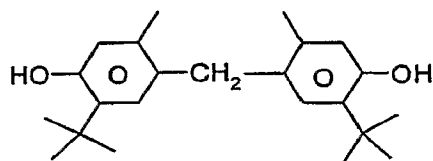



15

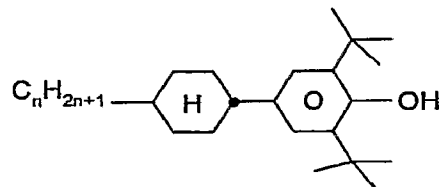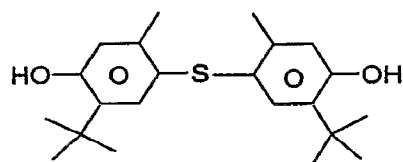



20



25

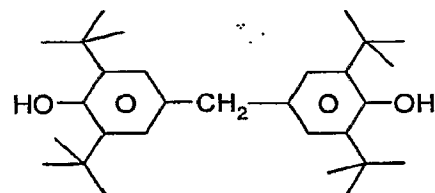


30

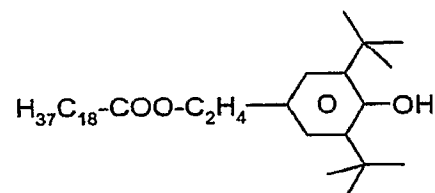


35

5

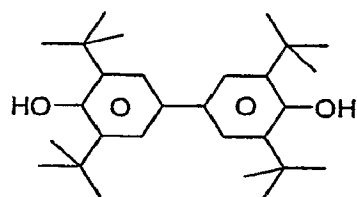


10

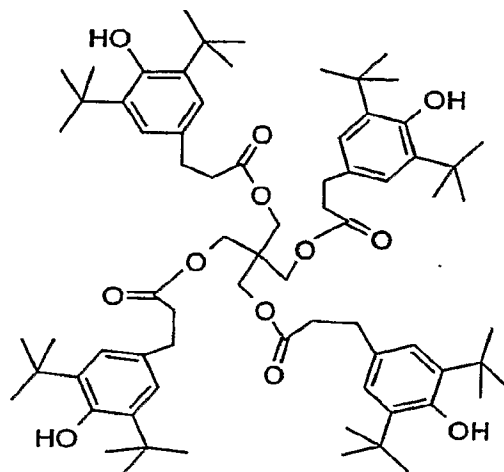


15


20

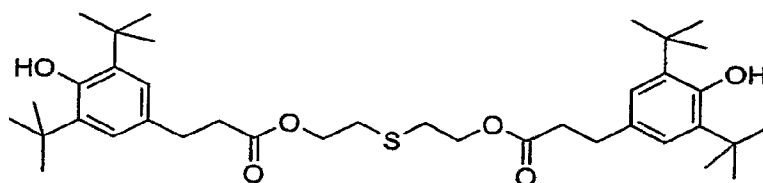

25

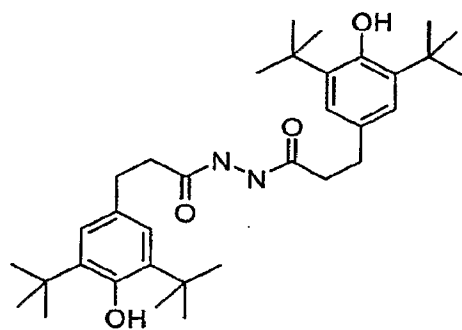


30

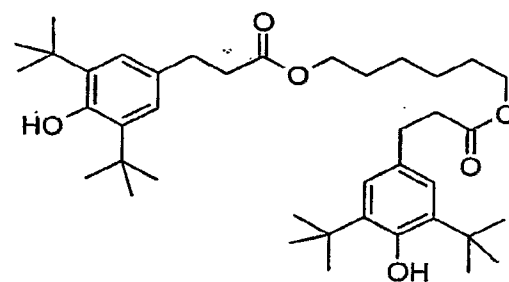

35


5

10

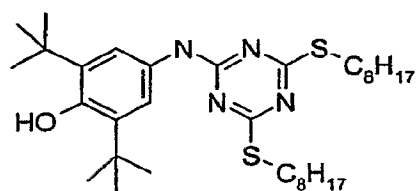


15


20

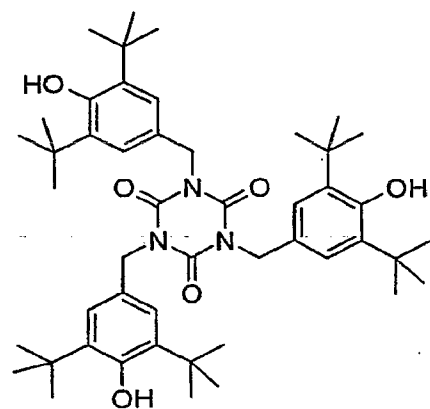





25










30

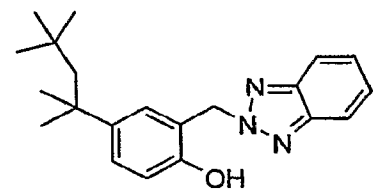


35

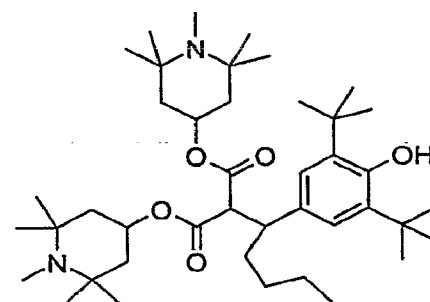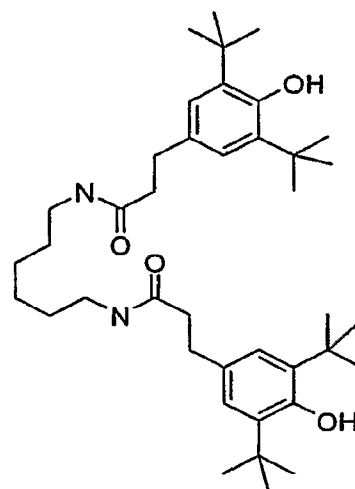

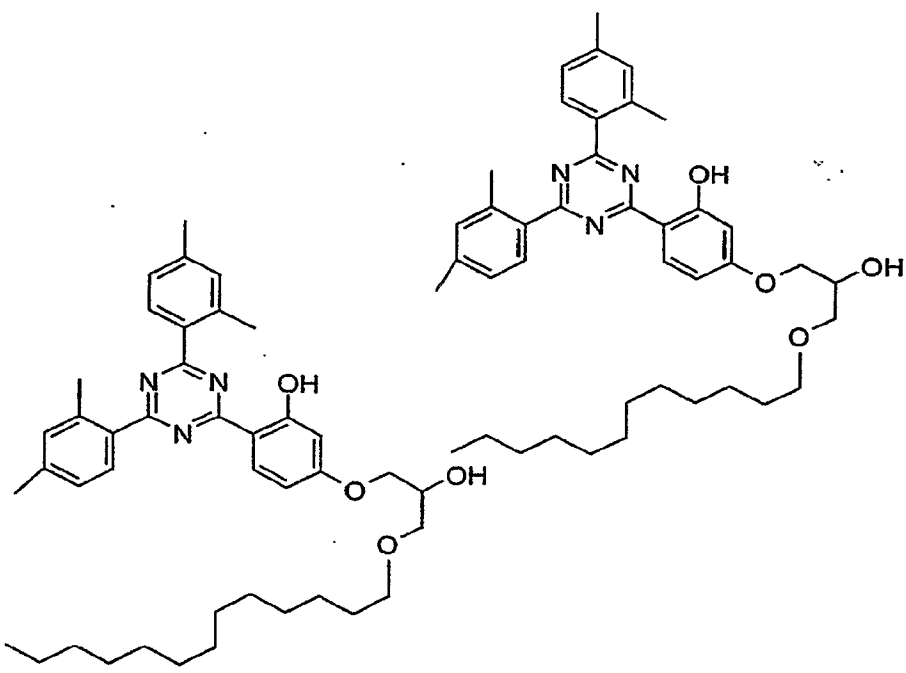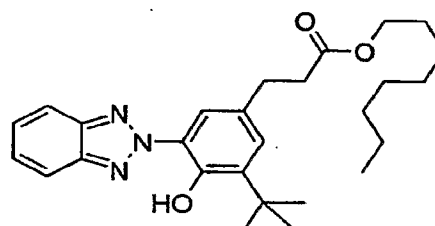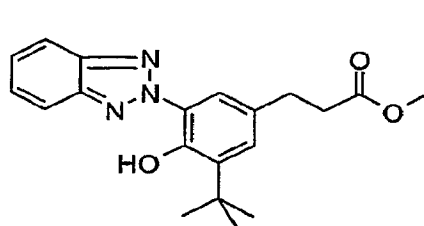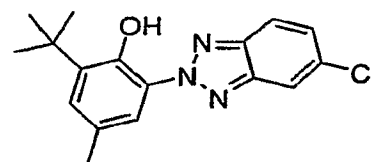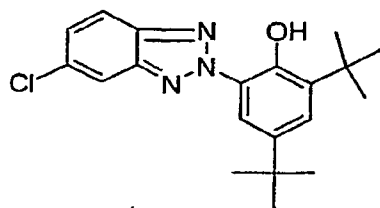

- 67 -

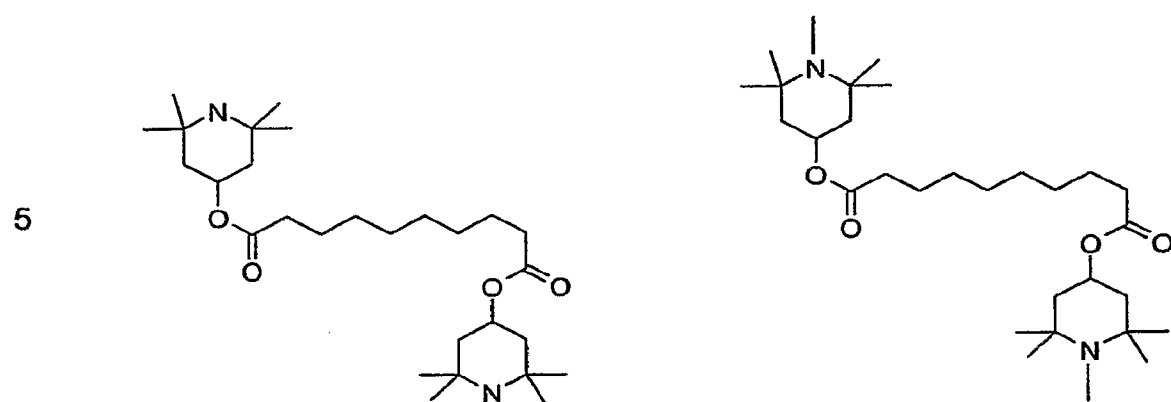

Percentages given herein are weight% and generally related to the total amount of a composition or mixture except stated otherwise.

Temperatures are given in degree Celsius (°C) unless stated otherwise.

T_{NI} means the clearing point at which a nematic medium becomes

5 isotropic. Δn is the optical anisotropy (birefringence) (at 589 nm, 20 °C). $\Delta\epsilon$ means the dielectric anisotropy (at 1 kHz, 20 °C). K_1 is the splay elastic constant, and K_3 is the bend elastic constant both given in pN.

Electrooptical data has been determined in a vertically aligned zenithal bistable nematic cell. Except stated otherwise the measurements have
10 been performed at 20 °C. V_{opt} is the optimum operating voltage (in V) derived from the corrected switching field $E_{LC@100\mu s}$ (at 25 °C; in zenithal bistable test cells with the actual cell gap d of about 4 to about 5 μm ; 100 μs pulse) by $V_{opt} = E_{LC@100\mu s} \cdot d_{opt}$ (with d_{opt} (in μm) being $\lambda/(2\Delta n) + 0.4$ for $\Delta n < 0.11$ and $\lambda\sqrt{3}/(2\Delta n) + 0.4$ for $\Delta n > 0.11$; $\lambda = 0.555 \mu m$, and the 0.4 factor
15 is an empirical correction factor), if not stated otherwise. Optical response time τ_{opt} (in ms) is calculated from $\tau_{opt} = \tau \cdot d_{opt}^2/d^2$ with τ being the experimental response time, d_{opt} being as defined above and d being the experimental cell gap.

20 The following Examples should further illustrate the present invention as described above and in the claims but not meant to restrict its scope.

25

30

35

Examples

Test samples were prepared by weighing out the appropriate weight amounts (percentage weight/weight) of the individual components. The sample was then homogenised by heating into the isotropic phase and thoroughly mixing. The mixture was then stirred with a given concentration of alumina and then filtered ($0.2\mu\text{m}$) to just leave the liquid crystal mixture. The nematic to isotropic transition temperature (or clearing point, T_{NI}), dielectric anisotropy ($\Delta\epsilon$), birefringence (Δn), splay and bend elastic constants (K_1 and K_3), and rotational viscosities (γ_1) were determined as described in the Merck brochure "Physical Properties of Liquid Crystals – Description of the measurement methods", ed. W. Becker (1998). Values for single compounds are extrapolated from those determined using a known concentration (usually 10 weight% of the single compound) in a standard host mixture ZLI-4792 (Merck KGaA, Darmstadt, Germany) for which the initial mixture values are also known. The electrooptical performance of each mixture in a zentihal bistable nematic device was measured using a simple experimental set-up and the vertically aligned type test cells. This required a transmissive mode microscope with a mounted photo-detector connected to an oscilloscope. This allowed the transmission through crossed polarisers to be monitored. The test cell was mounted on a heating stage under the microscope to permit measurements at 25°C . Bipolar electrical pulses (of varying duration and voltage) were used to ensure that there was no net d.c. voltage applied to the cell. The trailing edge (and so polarity) of each pulse therefore determined the final switched state (depending on the duration and voltage). Two signal generators were necessary to ensure that the correct initial state is first selected, with the first signal triggering the second (with an appropriate phase difference). Both signals were amplified by passing the output of the signal generators through an amplifier before being connected to the test cell. For the B-W transition, the voltages required for 10 and 90% transmission changes and reverse 90 and 10% transmission changes were measured for various pulse durations. For the W-B transition, the voltages required for 90 and 10% transmission changes only were measured for various pulse durations. These levels were set on the oscilloscope once the 0 and 100% transmission levels were known (i.e.

black and white), and they could also be used to determine the optical response time of the transition (for 10 to 90% transmission changes).

$E_{LC@100\mu s}$ was determined from the average switching field of both the W-B and B-W transitions in these examples.

5

Vertically aligned type test cells having a standard homeotropic alignment layer on one substrate and a grating plus homeotropic alignment layer on the other substrate (available from ZBD Displays Ltd., Malvern, UK) were used with cell gaps typically 4-5 μm , in transmissive mode and with crossed polarisers. Due to the varying cell gaps and different mixture Δn values, the retardation was not optimised but this is not crucial as it only decreases the contrast.

10

15

20

25

30

35

Example 1

	Compound	Amount (wt%)	T_{NI} (°C)	98.0
	CDU-2-F	10	$\Delta\epsilon$	13.7
	CDU-3-F	10	Δn	0.0685
5	CDU-5-F	10	K ₁ (pN)	10.6
	CCZU-2-F	6	K ₃ (pN)	17.7
	CCZU-3-F	13		
	CCZU-5-F	6		
	CCQU-2-F	10	τ_{opt} (ms)	36
10	CCQU-3-F	10	d (μm)	4.7
	CCQU-5-F	10	d _{opt} (μm)	4.5
	CCOC-3-3	5	V _{opt} ^{100μs} (V)	12.8
	CCOC-3-5	5	V _{opt} ^{1000μs} (V)	9.4
	CCOC-4-3	5	V _{opt} ^{10000μs} (V)	5.7
15	<i>Total</i>	100		

Example 2

	Compound	Amount (wt%)	T_{NI} (°C)	100.5
20	CDU-2-F	10	$\Delta\epsilon$	12.4
	CDU-3-F	10	Δn	0.0716
	CDU-5-F	10	K ₁ (pN)	11.4
	CCZU-2-F	5	K ₃ (pN)	17.1
	CCZU-3-F	10		
25	CCZU-5-F	5		
	CCQU-2-F	10	τ_{opt} (ms)	33
	CCQU-3-F	10	d (μm)	4.5
	CCQU-5-F	10	d _{opt} (μm)	4.3
	CC-5-V	12	V _{opt} ^{100μs} (V)	14.4
30	CCPC-33	3	V _{opt} ^{1000μs} (V)	10.3
	CCPC-34	3	V _{opt} ^{10000μs} (V)	8.0
	CCPC-35	2		
	<i>Total</i>	100		

Example 3

	Compound	Amount (wt%)	T_{NI} (°C)	93.8
	PGU-2-F	10	$\Delta\epsilon$	17.3
	PGU-3-F	10	Δn	0.1350
5	PGU-5-F	10	K ₁ (pN)	12.0
	CCGU-3-F	5	K ₃ (pN)	16.0
	CCZU-2-F	5		
	CCZU-3-F	10		
	CCZU-5-F	5	τ_{opt} (ms)	22
10	CCQU-2-F	10	d (μm)	4.7
	CCQU-3-F	10	d _{opt} (μm)	4.0
	CCQU-5-F	10	V _{opt} ^{100μs} (V)	18.6
	PP-1-2V1	9	V _{opt} ^{1000μs} (V)	15.9
15	CCPC-33	4	V _{opt} ^{10000μs} (V)	15.0
	CCPC-34	1		
	CCPC-35	1		
	<i>Total</i>	100		

Example 4

20	Compound	Amount (wt%)	T_{NI} (°C)	100.0
	CGU-2-F	10	$\Delta\epsilon$	14.9
	CGU-3-F	10	Δn	0.0931
	CGU-5-F	10	K ₁ (pN)	8.6
25	CCGU-3-F	5	K ₃ (pN)	17.3
	CCZU-2-F	7		
	CCZU-3-F	15		
	CCZU-5-F	7	τ_{opt} (ms)	19
	CCQU-2-F	10	d (μm)	4.4
30	CCQU-3-F	10	d _{opt} (μm)	3.4
	CCQU-5-F	10	V _{opt} ^{100μs} (V)	8.1
	CCPC-33	2	V _{opt} ^{1000μs} (V)	5.0
	CCPC-34	2	V _{opt} ^{10000μs} (V)	4.0
35	CCPC-35	2		
	<i>Total</i>	100		

Example 5

	Compound	Amount (wt%)	T_{NI} (°C)	90.8
	PGU-2-F	10	$\Delta\epsilon$	15.9
	PGU-3-F	10	Δn	0.1465
5	PGU-5-F	10	K ₁ (pN)	9.2
	CGU-2-F	10	K ₃ (pN)	12.5
	CGU-3-F	10		
	CGU-5-F	10		
10	CCGU-3-F	5	τ_{opt} (ms)	29
	BCH-3F.F.F	10	d (μm)	4.4
	BCH-5F.F.F	10	d _{opt} (μm)	3.7
	CCPC-33	5	V _{opt} ^{100μs} (V)	16.2
	CCPC-34	5	V _{opt} ^{1000μs} (V)	14.0
15	CCPC-35	5	V _{opt} ^{10000μs} (V)	13.5
	<i>Total</i>	100		

Example 6

	Compound	Amount (wt%)	T_{NI} (°C)	91.8
20	PGU-2-F	10	$\Delta\epsilon$	17.4
	PGU-3-F	10	Δn	0.1338
	PGU-5-F	10	K ₁ (pN)	8.1
	CGU-2-F	10	K ₃ (pN)	13.2
	CGU-3-F	10		
25	CGU-5-F	10		
	CCGU-3-F	3	τ_{opt} (ms)	30
	CCZU-2-F	6	d (μm)	4.4
	CCZU-3-F	13	d _{opt} (μm)	4.0
30	CCZU-5-F	6	V _{opt} ^{100μs} (V)	15.8
	CCPC-33	4	V _{opt} ^{1000μs} (V)	13.4
	CCPC-34	4	V _{opt} ^{10000μs} (V)	12.8
	CCPC-35	4		
	<i>Total</i>	100		

Example 7

	Compound	Amount (wt%)	T_{NI} (°C)	91.2
	CDU-2-F	10	$\Delta\epsilon$	15.4
	CDU-3-F	10.5	Δn	0.0933
5	CDU-5-F	9.5	K ₁ (pN)	7.4
	CGU-2-F	10	K ₃ (pN)	14.8
	CGU-3-F	10		
	CGU-5-F	10		
	CCGU-3-F	5	τ_{opt} (ms)	22
10	CCZU-2-F	6.5	d (μm)	4.7
	CCZU-3-F	13	d _{opt} (μm)	3.4
	CCZU-5-F	6.5	V _{opt} ^{100μs} (V)	9.7
	CCPC-33	3	V _{opt} ^{1000μs} (V)	7.4
15	CCPC-34	4	V _{opt} ^{10000μs} (V)	5.9
	CCPC-35	2		
	<i>Total</i>	100		

Example 8

20	Compound	Amount (wt%)	T_{NI} (°C)	92.8
	PGU-2-F	10	$\Delta\epsilon$	16.2
	PGU-3-F	10	Δn	0.1134
	PGU-5-F	10	K ₁ (pN)	9.6
	CCGU-3-F	2	K ₃ (pN)	14.1
25	CCZU-2-F	6		
	CCZU-3-F	11		
	CCZU-5-F	6	τ_{opt} (ms)	35
	CCQU-2-F	10	d (μm)	4.2
30	CCQU-3-F	10	d _{opt} (μm)	4.6
	CCQU-5-F	10	V _{opt} ^{100μs} (V)	13.7
	CCOC-3-3	5	V _{opt} ^{1000μs} (V)	10.6
	CCOC-3-5	5	V _{opt} ^{10000μs} (V)	8.9
	CCOC-4-3	5		
35	<i>Total</i>	100		

Example 9

	Compound	Amount (wt%)	T_{NI} (°C)	92.6
	CDU-2-F	10	$\Delta\epsilon$	13.6
	CDU-3-F	10	Δn	0.0929
5	CDU-5-F	10	K ₁ (pN)	9.9
	CGU-2-F	10	K ₃ (pN)	14.0
	CGU-3-F	10		
	CGU-5-F	10		
	CCGU-3-F	4	τ_{opt} (ms)	27
10	CCP-2F.F.F	8	d (μm)	4.2
	CCP-3F.F.F	8	d _{opt} (μm)	3.4
	CCP-5F.F.F	4	V _{opt} ^{100μs} (V)	13.5
	CC-5-V	2	V _{opt} ^{1000μs} (V)	8.7
15	CCPC-33	5	V _{opt} ^{10000μs} (V)	7.2
	CCPC-34	5		
	CCPC-35	4		
	<i>Total</i>	100		

20

25

30

35

Example 10

	Compound	Amount (wt%)	T_{NI} (°C)	98.0
	AUUQU-3-F	6	$\Delta\epsilon$	18.9
	AGUQU-3-F	6	Δn	0.0928
5	APUQU-2-F	6	K ₁ (pN)	9.8
	CGU-2-F	5	K ₃ (pN)	15.2
	CGU-3-F	5		
	CGU-5-F	5		
	CCZU-2-F	5.5	τ_{opt} (ms)	29
10	CCZU-3-F	10.5	d (μm)	4.1
	CCZU-5-F	5.5	d _{opt} (μm)	3.4
	CCQU-2-F	10	V _{opt} ^{100μs} (V)	9.9
15	CCQU-3-F	10	V _{opt} ^{1000μs} (V)	6.5
	CCQU-5-F	10	V _{opt} ^{10000μs} (V)	5.0
	CC-5-V	9.5		
	CCPC-33	2		
	CCPC-34	2		
20	CCPC-35	2		
	<i>Total</i>	100		

25

30

35

Example 11

5	Compound	Amount (wt%)	T_{NI} (°C)	96.6
	CDUQU-3-F	6	$\Delta\epsilon$	16.2
	CGU-2-F	10	Δn	0.0930
	CGU-3-F	10	K ₁ (pN)	8.5
	CGU-5-F	10	K ₃ (pN)	17.5
10	CCGU-3-F	2		
	CCZU-2-F	6.5		
	CCZU-3-F	13	τ_{opt} (ms)	31
	CCZU-5-F	6.5	d (μm)	4.6
	CCQU-2-F	10	d _{opt} (μm)	3.4
15	CCQU-3-F	10	V _{opt} ^{100μs} (V)	9.7
	CCQU-5-F	10	V _{opt} ^{1000μs} (V)	6.4
	CCPC-33	2	V _{opt} ^{10000μs} (V)	5.1
	CCPC-34	2		
	CCPC-35	2		
20	<i>Total</i>	100		

25

30

35

Example 12

	Compound	Amount (wt%)	T_{NI} (°C)	96.8
	CGU-2-F	10	$\Delta\epsilon$	15.5
	CGU-3-F	10	Δn	0.0934
5	CGU-5-F	10	K ₁ (pN)	8.5
	CCGU-3-F	5	K ₃ (pN)	16.9
	ACQU-5-F	10		
	CCZU-2-F	6		
10	CCZU-3-F	13	τ_{opt} (ms)	28
	CCZU-5-F	6	d (μm)	4.6
	CCQU-2-F	8	d _{opt} (μm)	3.4
	CCQU-3-F	8	V _{opt} ^{100μs} (V)	9.2
15	CCQU-5-F	8	V _{opt} ^{1000μs} (V)	5.6
	CCPC-33	2	V _{opt} ^{10000μs} (V)	4.3
	CCPC-34	2		
	CCPC-35	2		
20	<i>Total</i>	100		

25

30

35

Example 13

	Compound	Amount (wt%)	T_{NI} (°C)	94.9
	CGU-2-F	10	$\Delta\epsilon$	13.1
	CGU-3-F	10	Δn	0.0888
5	CGU-5-F	10	K ₁ (pN)	9.3
	CCGU-3-F	5	K ₃ (pN)	16.2
	CCZU-2-F	5	V _{opt} ^{100μs} (V)	7.2
	CCZU-3-F	10		
	CCZU-5-F	5	τ_{opt} (ms)	7
10	CCQU-2-F	10	d (μ m)	4.0
	CCQU-3-F	10	d _{opt} (μ m)	3.5
	CCQU-5-F	10		
15	CCOC-3-3	5	V _{opt} ^{1000μs} (V)	4.4
	CCOC-3-5	5	V _{opt} ^{10000μs} (V)	2.8
	CCOC-4-3	5		
	<i>Total</i>	100		

Example 14

	Compound	Amount (wt%)	T_{NI} (°C)	98.1
	AUUQU-3-F	5	$\Delta\epsilon$	22.9
5	AGUQU-3-F	5	Δn	0.0926
	APUQU-2-F	5	K ₁ (pN)	8.3
	CDUQU-3-F	5	K ₃ (pN)	17.9
	CGU-2-F	5	V _{opt} ^{100μs} (V)	5.1
	CGU-3-F	5		
	CGU-5-F	5	τ_{opt} (ms)	6
10	ACQU-5-F	10	d (μ m)	4.1
	CCZU-2-F	5	d _{opt} (μ m)	3.4
	CCZU-3-F	10		
15	CCZU-5-F	5	V _{opt} ^{1000μs} (V)	3.1
	CCQU-2-F	10	V _{opt} ^{10000μs} (V)	2.3
	CCQU-3-F	10		
	CCQU-5-F	10		
20	CCPC-33	2		
	CCPC-34	2		
	CCPC-35	1		
	<i>Total</i>	100		

25

30

35

Example 15

	Compound	Amount (wt%)	T_{NI} (°C)	70.3
5	CGU-2-F	11	$\Delta\epsilon$	12.5
	CGU-3-F	11	Δn	0.1084
	CGU-5-F	11	K ₁ (pN)	7.6
	CCZU-2-F	6	K ₃ (pN)	11.2
	CCZU-3-F	14		
10	CCZU-5-F	6		
	BCH-3F.F.F	10	τ_{opt} (ms)	16
	BCH-5F.F.F	14	d (μm)	4.7
15	BCH-3F.F	6	d _{opt} (μm)	3.0
	ECCP-5F.F	8	V _{opt} ^{100μs} (V)	8.6
	CBC-33F	3	V _{opt} ^{1000μs} (V)	5.2
20	<i>Total</i>	100	V _{opt} ^{10000μs} (V)	3.8

25

30

35

Example 16

	Compound	Amount (wt%)	T_{NI} (°C)	98.8
5	CGU-2-F	10	$\Delta\epsilon$	10.3
	CGU-3-F	10	Δn	0.0912
	CGU-5-F	10	K ₁ (pN)	11.3
	CCGU-3-F	6	K ₃ (pN)	15.6
10	CCZU-2-F	5		
	CCZU-3-F	10		
	CCZU-5-F	5	τ_{opt} (ms)	20
	CCQU-2-F	5	d (μm)	4.7
15	CCQU-3-F	5	d _{opt} (μm)	3.4
	CCQU-5-F	5	V _{opt} ^{100μs} (V)	15.4
	CC-5-V	20	V _{opt} ^{1000μs} (V)	10.4
	CCPC-33	3	V _{opt} ^{10000μs} (V)	8.6
20	CCPC-34	3		
	CCPC-35	3		
	<i>Total</i>	100		

25

30

35

Example 17

Compound	Amount (wt%)	T_{NI} (°C)	90.0
CGU-2-F	10	$\Delta\epsilon$	11.2
CGU-3-F	10	Δn	0.1208
CGU-5-F	10	K ₁ (pN)	8.3
CCGU-3-F	3	K ₃ (pN)	14.4
CCZU-2-F	7		
CCZU-3-F	15		
CCZU-5-F	7	τ_{opt} (ms)	45
BCH-2F.F	8	d (μm)	4.5
BCH-3F.F	8	d _{opt} (μm)	4.4
BCH-5F.F	8	V _{opt} ^{100μs} (V)	18.4
PGIGI-3-F	8	V _{opt} ^{1000μs} (V)	14.5
CCPC-33	2	V _{opt} ^{10000μs} (V)	12.8
CCPC-34	2		
CCPC-35	2		
<i>Total</i>	100		

Example 18

	Compound	Amount (wt%)	T_{NI} (°C)	95.3
	CGU-2-F	10	$\Delta\epsilon$	11.1
5	CGU-3-F	10	Δn	0.0967
	CGU-5-F	10	K ₁ (pN)	10.3
	CCGU-3-F	5	K ₃ (pN)	14.6
	CCZU-2-F	6		
10	CCZU-3-F	11		
	CCZU-5-F	6	τ_{opt} (ms)	24
	CCQU-2-F	5	d (μm)	4.6
	CCQU-3-F	5	d _{opt} (μm)	3.3
15	CCQU-5-F	5	V _{opt} ^{100μs} (V)	17.0
	D-301	5	V _{opt} ^{1000μs} (V)	14.3
	D-302	5	V _{opt} ^{10000μs} (V)	13.3
	D-401	5		
	D-402	5		
20	CCPC-33	2.5		
	CCPC-34	2.5		
	CCPC-35	2		
	<i>Total</i>	100		

25

30


35

Example 19

	Compound	Amount (wt%)	T_{NI} (°C)	97.3
	CGU-2-F	6	$\Delta\epsilon$	13.9
5	CGU-3-F	6	Δn	0.0859
	CGU-5-F	6	K ₁ (pN)	8.5
	CCGU-3-F	6	K ₃ (pN)	17.3
	CCZU-2-F	6		
10	CCZU-3-F	14		
	CCZU-5-F	6	τ_{opt} (ms)	24
	CCQU-2-F	10	d (μm)	4.7
	CCQU-3-F	10	d _{opt} (μm)	3.6
15	CCQU-5-F	10	V _{opt} ^{100μs} (V)	7.4
	CCQG-2-F	10	V _{opt} ^{1000μs} (V)	3.9
	CCQG-3-F	10	V _{opt} ^{10000μs} (V)	3.0
	<i>Total</i>	100		

Claims

1. Liquid crystal composition for bistable liquid crystal devices comprising a component (π) said component (π) containing one or more compounds having a phenyl ring of formula A





A

whereby

X^A is F, Cl, SF_5 , NCS, or a C_1 to C_8 alkanyl, alkenyl or alkoxy radical substituted with at least one F atom; and

L^A is H or F.

2. Liquid crystal composition according to claim 1 characterized in that it is for zenithal bistable nematic liquid crystal devices.
3. Liquid crystal composition according to any one of the preceding claims characterized in that said composition comprises at least 60 weight% or more (based on the total weight of the composition) of said component (π).
4. Liquid crystal composition according to at any one of the preceding claims characterized in that in formula A X^A is F or Cl.
5. Liquid crystal composition according to any one of claims 1 to 3 characterized in that said one or more compounds having a phenyl ring of formula A as defined in claim 1 are selected from the compounds of formula I and/or II

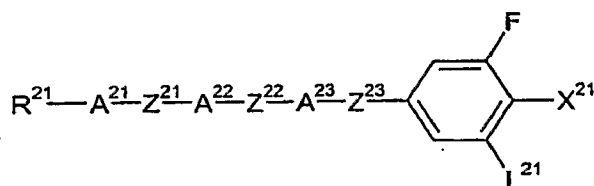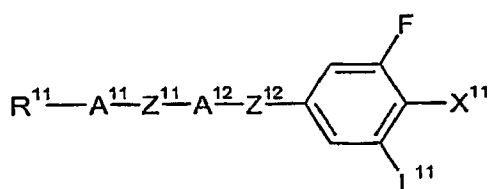

whereby


R^{11} and R^{21} are independently of each other C_1 - C_{15} alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by $-\text{O}-$, $-\text{S}-$, $-\text{CH}=\text{CH}-$, $-\text{C}\equiv\text{C}-$, $-\text{CO}-\text{O}-$, $-\text{OC}-\text{O}-$ such that there are no hetero atoms adjacent to each other;

Z^{11} , Z^{12} , Z^{21} , Z^{22} , Z^{23} are independently of each other a single bond, $-\text{CO}-\text{O}-$, $-\text{O}-\text{CO}-$, $-\text{CH}_2\text{O}-$, $-\text{OCH}_2-$, $-\text{CF}_2\text{O}-$, $-\text{OCF}_2-$, $-\text{CH}_2\text{CH}_2-$, $(-\text{CH}_2\text{CH}_2)_2$, $-\text{CF}=\text{CF}-$, $-\text{CF}_2\text{CF}_2-$, $-\text{CH}_2\text{CF}_2-$, $-\text{CF}_2\text{CH}_2-$, $-\text{CH}=\text{CH}-$ or $-\text{C}\equiv\text{C}-$;

X^{11} and X^{21} are independently of each other is F, Cl, SF_5 , NCS, or a C_1 to C_8 alkanyl, alkenyl or alkoxy radical substituted with at least one F atom;

L^{11} and L^{21} are independently of each other H or F; and

A^{11} , A^{12} , A^{21} , A^{22} and A^{23} are independently of each other one of the following rings:

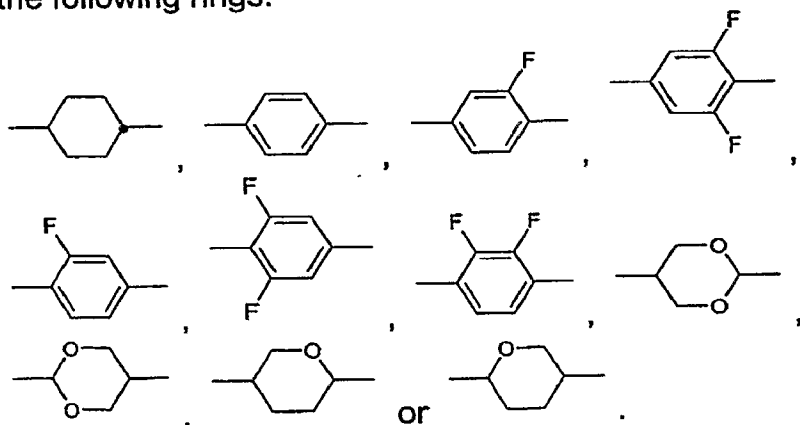


6. Liquid crystal composition according to the preceding claim characterized in that in formula I

R^{11} is a C_1 to C_8 alkanyl, alkenyl or alkoxy radical unsubstituted or substituted with at least one F atom;


L^{11} is H or F;

X^{11} is F or Cl;


Z^{11} and Z^{12} are a single bond, $-CF_2O-$ or $-CO-O-$ whereby at least one of Z^{11} and Z^{12} is a single bond;

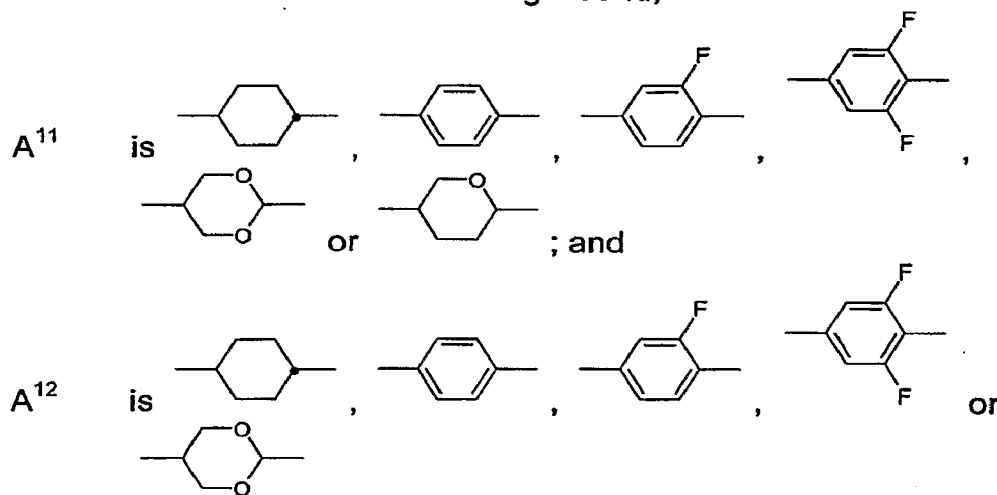


7. Liquid crystal composition according to the preceding claim characterized in that the compounds of formula I are selected from one or more of the following formulas:



I-A

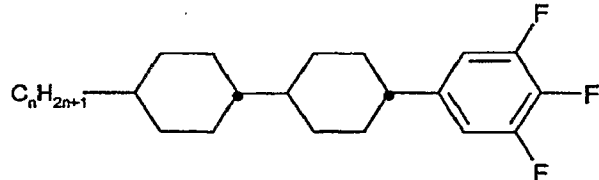


I-B

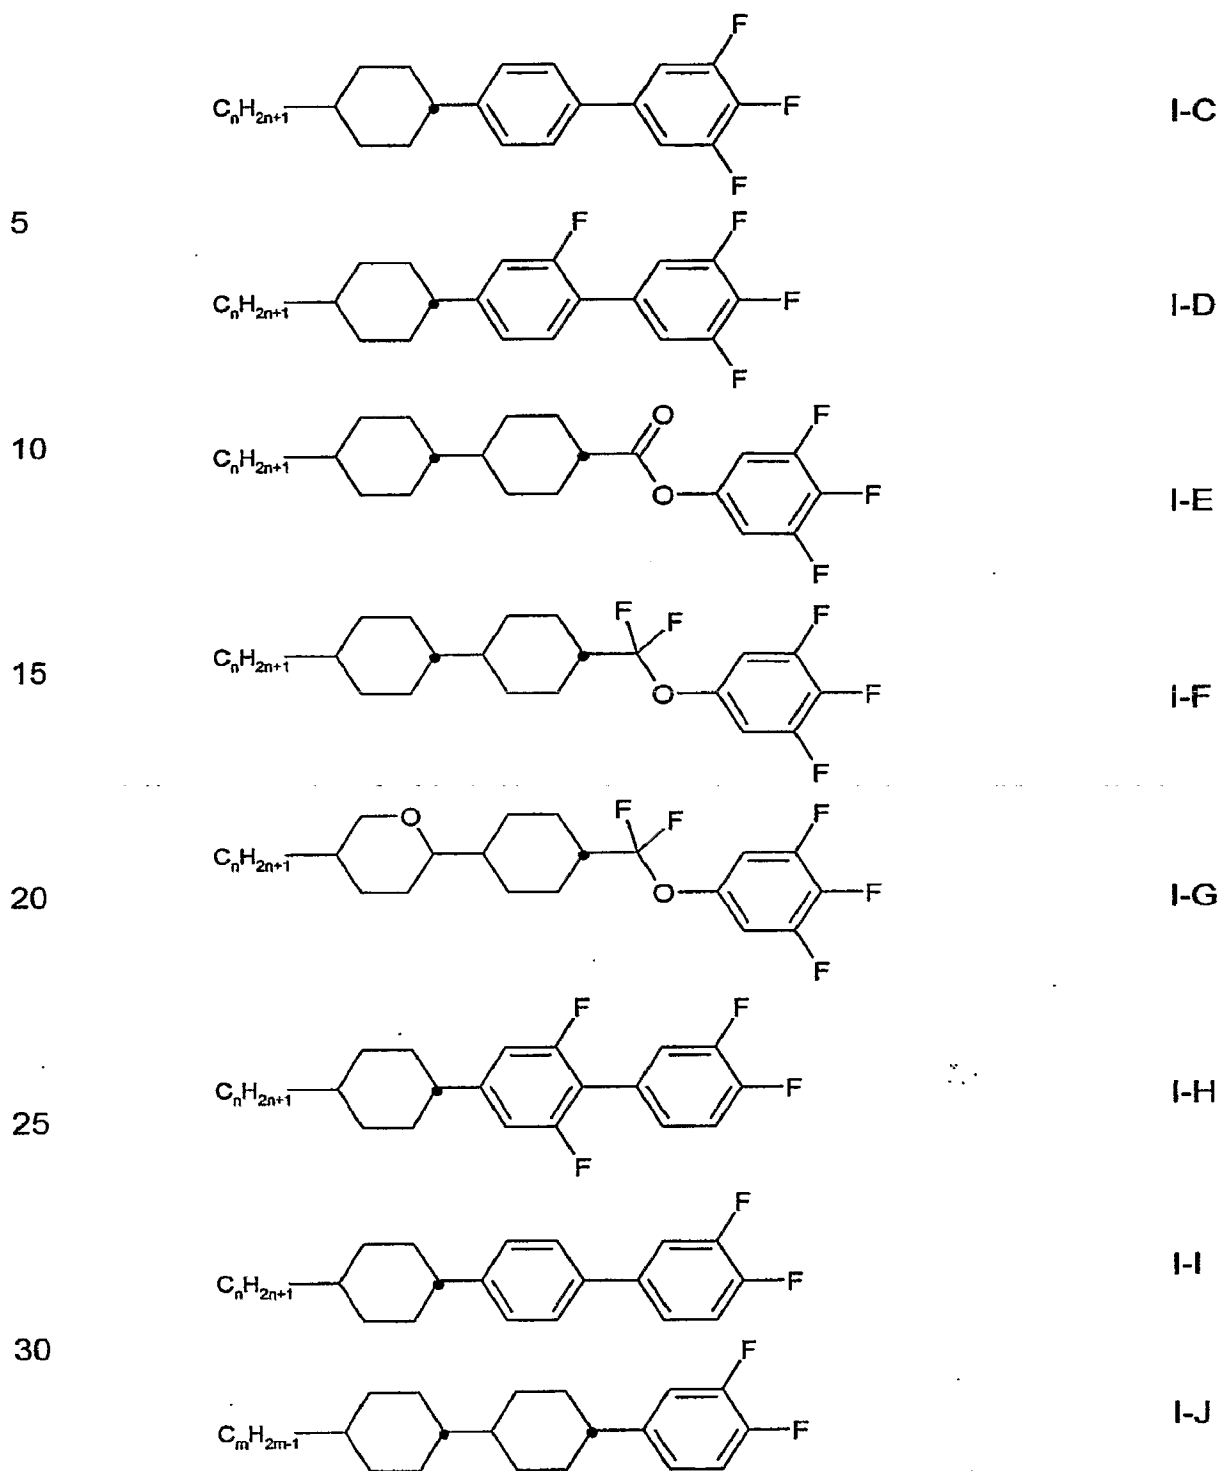

whereby n is an integer from 1 to 8; and
 m is an integer from 2 to 8.


8. Liquid crystal composition according to any one of claims 5 or 6 characterized in that the compounds of formula I are comprising compounds of the following formulas:

5

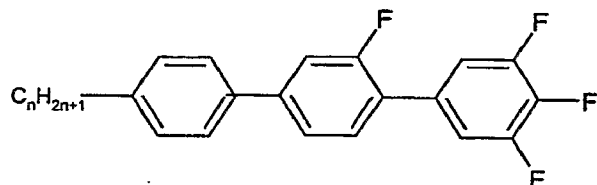

I-K

10

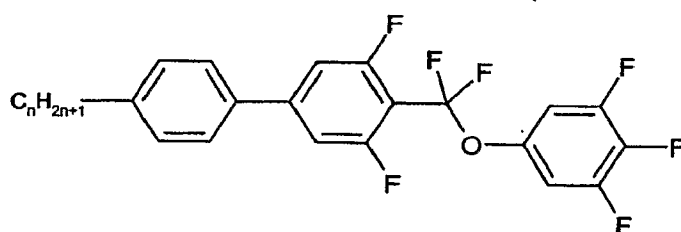

I-L

15

whereby

n is an integer from 1 to 8

9. Liquid crystal composition according to any one of claims 5 to 8 characterized in that in formula II



20


R^{21} is a C_1 to C_8 alkanyl, alkenyl or alkoxy radical unsubstituted or substituted with at least one F atom;

L^{21} is F;

X^{21} is F or Cl;

25 Z^{21} , Z^{22} and Z^{23} are each a single bond, $-CF_2O-$ or $-CO-O-$ whereby at least two of Z^{21} , Z^{22} and Z^{23} are each a single bond;

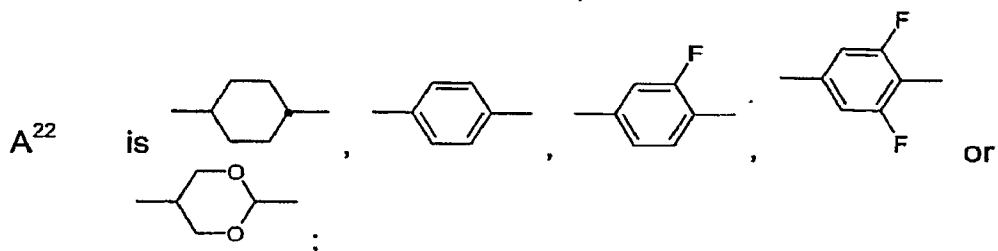


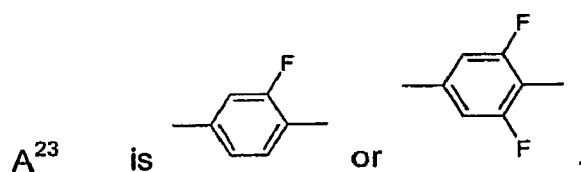


5

10. Liquid crystal composition according to the preceding claim characterized in that the compounds of formula II are selected from one or more of the following formulas:


10

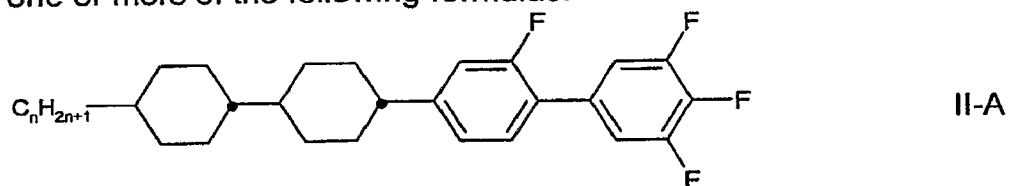


15

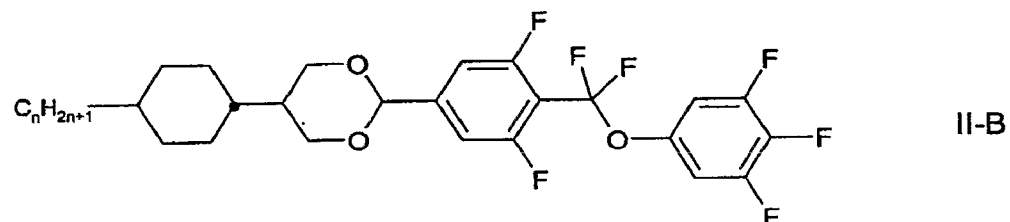


20

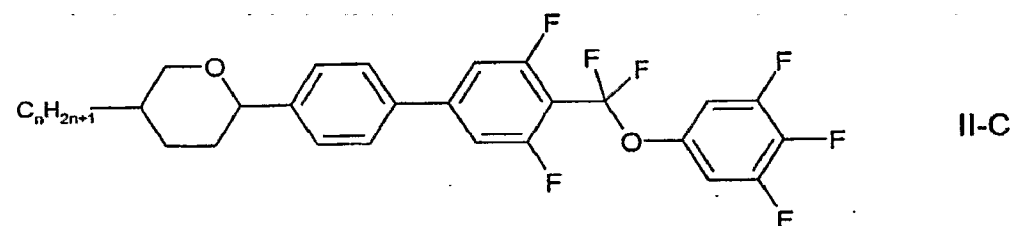

25

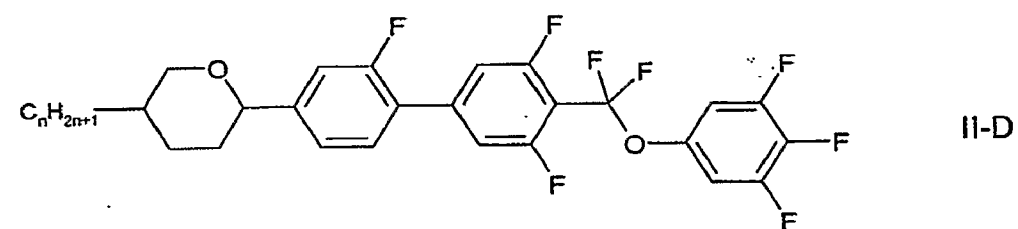

30

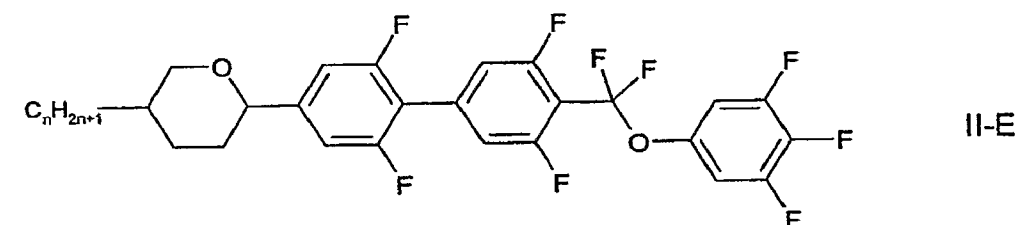







whereby

n is an integer from 1 to 8

35


11. Liquid crystal composition according to any one of the preceding claims characterized in that it comprises 80 weight% or more (based on the total weight of the composition) of said component (π).

- 5 12. Liquid crystal composition according to any one of the preceding claims characterized in that it further comprises one or more of the following compounds:

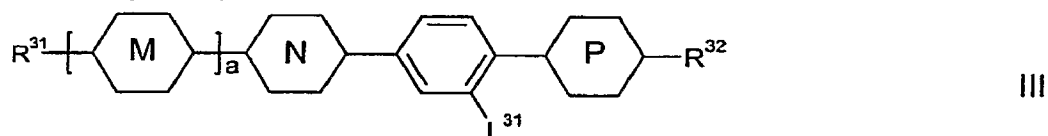

in which


- 25 a and b are independently of each other 0 or 1;
 $R^{31}, R^{32}, R^{41}, R^{42}, R^{51}, R^{52}, R^{61}, R^{62}, R^{71}, R^{72}, R^{81}$ and R^{82}
 are independently of each other C_1 - C_{15} alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by -O-, -S-,
 30 -CH=CH-, -C \equiv C-, -CO-O-, -OC-O- such that there are no hetero atoms adjacent to each other;
 L^{31} is H or F;
 Z^{41} is -CO-O-, -CH₂O-, -OCH₂-, -CF₂O-, -OCF₂-, -CH₂CH₂-,
 35 -CF₂CF₂-, -CH₂CF₂-, -CF₂CH₂-, -CH=CH- or -C \equiv C-;




5

are independently of each other


or ;



is




or




;


10



is



or




,

in which L^{32} and L^{33} are independently of each other H or F.


15

13. Liquid crystal composition according to any one of the preceding claims characterized in that it further comprises one or more of the following compounds:

20




IX




X

25



XI



XII

30


in which

35


R^{91} , R^{92} , R^{101} , R^{102} , R^{111} , R^{121} and R^{122}

are independently of each other C_1 - C_{15} alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by $-O-$, $-S-$, $-CH=CH-$, $-C\equiv C-$, $-CO-O-$, $-OC-O-$ such that there are no hetero atoms directly linked to each other; preferably these radicals are independently of each other straight-chain alkanyl, alkenyl or alkoxy radicals with up to 8 carbon atoms;


Y^{111} is C_1 - C_{15} alkanyl or C_2 - C_{15} alkenyl that are independently of each other mono- or poly-substituted with halogen, or C_1 - C_{15} alkoxy which is mono- or poly-substituted with halogen; preferably it is an alkanyl or an alkoxy radical with up to 8 carbon atoms in which each of the hydrogen atoms are replaced by F; and

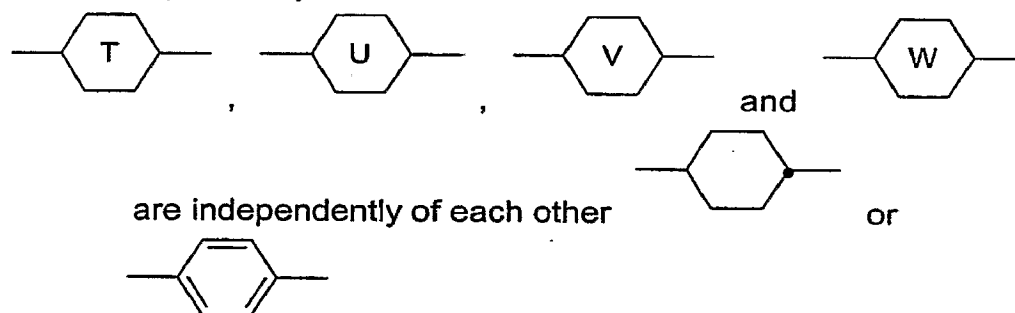

14. Liquid crystal composition according to any one of the preceding claims characterized in that it further comprises one or more of the following compounds:



XV



XVI

in which

R^{131} and R^{141} are independently of each other C_1 - C_{15} alkyl which is unsubstituted or mono- or poly-substituted with halogen and in which one or more of the CH_2 groups may be replaced independently of each other by -O-, -S-, -CH=CH-, -C \equiv C-, -CO-O-, -OC-O- such that there are no hetero atoms directly linked to each other; preferably these radicals are independently of each other straight-chain alkanyl, alkenyl or alkoxy radicals with up to 8 carbon atoms;

X^{131} and X^{141} are independently of each other F or Cl, preferably F; and

Z^{131} and Z^{141} are independently of each other a single bond, -CF₂O- or -CO-O-, preferably a single bond.

15. Bistable liquid crystal device comprising

- two outer substrates which, together with a frame, form a cell;
 - a liquid crystal composition present in said cell;
 - electrode structures with alignment layers on the inside of said outer substrates whereby at least one alignment layer comprises an alignment grating that permits the compounds of said liquid crystal composition to adopt at least two different stable states whereby the assembly of said electrode structures with said alignment layers being such that in a first driving mode a switching between the said at least two different stable states is achieved by applying suitable electric signals to said electrode structures;
- characterized in that said liquid crystal composition is the composition according to any one of the preceding claims.

16. Bistable liquid crystal device according to the preceding claim characterized in that it is a zenithal bistable nematic liquid crystal device.

17. Bistable liquid crystal device according to any one of claims 15 and 16 characterized in that said first driving mode is an active matrix (AM) mode.

- 5 18. Bistable liquid crystal device according to any one of claims 15 to 17
characterized in that said device comprises electrode structures the
assembly of which allowing said switching between said at least two
different stable states in said first driving mode and a switching of
said liquid crystal composition in a second monostable driving mode.
- 10 19. Bistable liquid crystal device according to the preceding claim
characterized in that said second monostable driving mode is an
active matrix (AM) mode.
- 15 20. Bistable liquid crystal device according to the preceding claim
characterized in that said second driving mode being a twisted
nematic (TN) TFT mode or an vertically aligned nematic (VAN) TFT
mode.


15

20

25

30

35



Figures

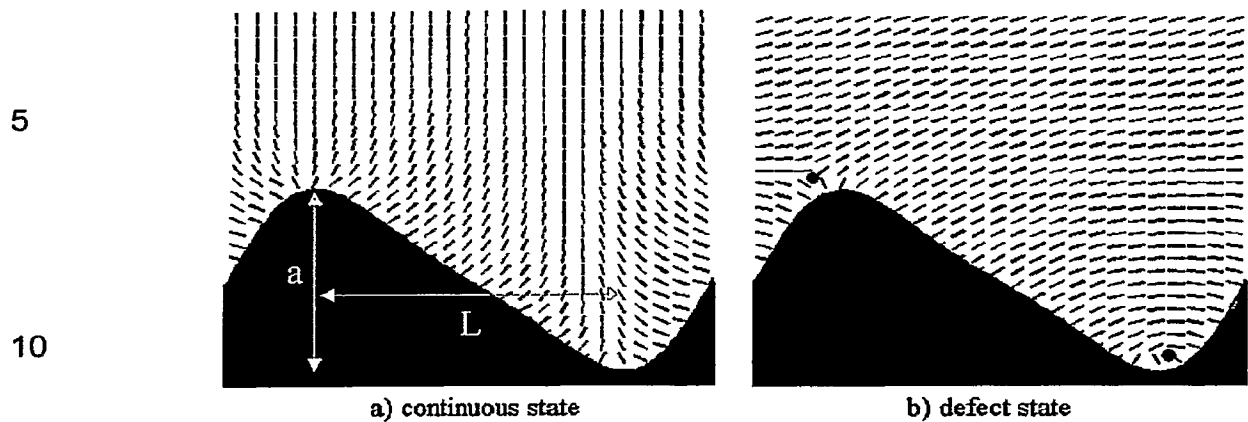


Figure 1. Illustration of zenithal bistability using grating alignment (with the lines indicating the local director) showing a) the high tilt (continuous) and b) the low tilt (defect) states.

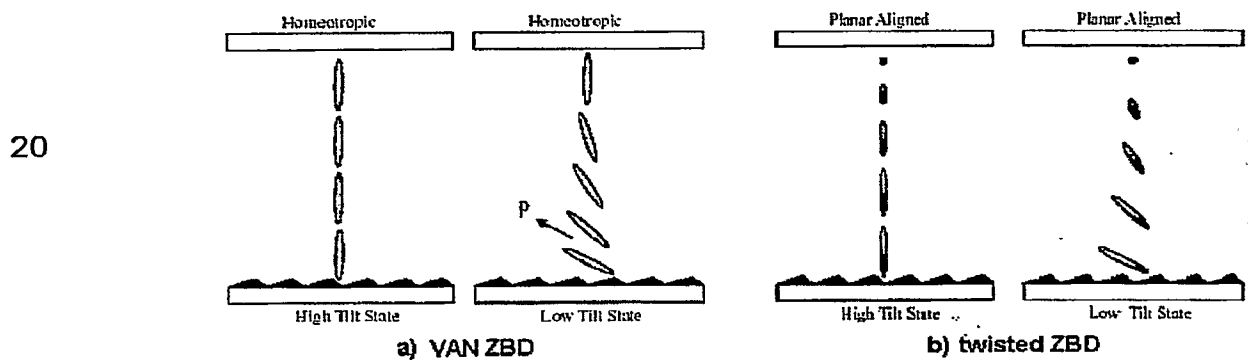


Figure 2. The a) VAN-HAN and b) HAN-TN geometries for ZBD showing the director distribution of the high and low tilt states.

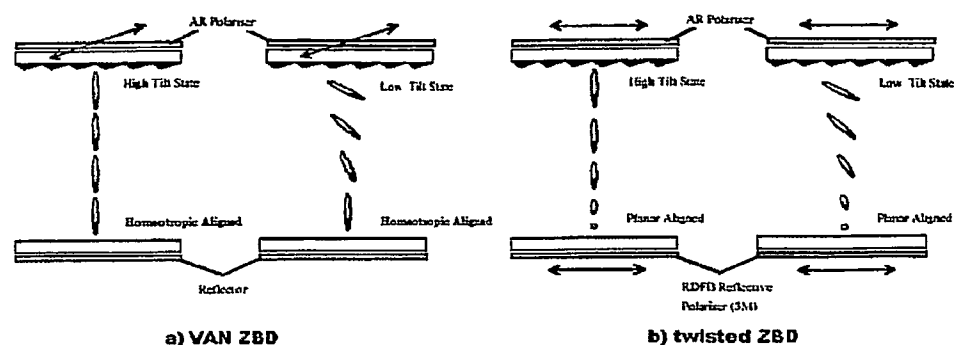


Figure 3. The a) VAN-HAN and b) HAN-TN geometries for ZBD reflective devices

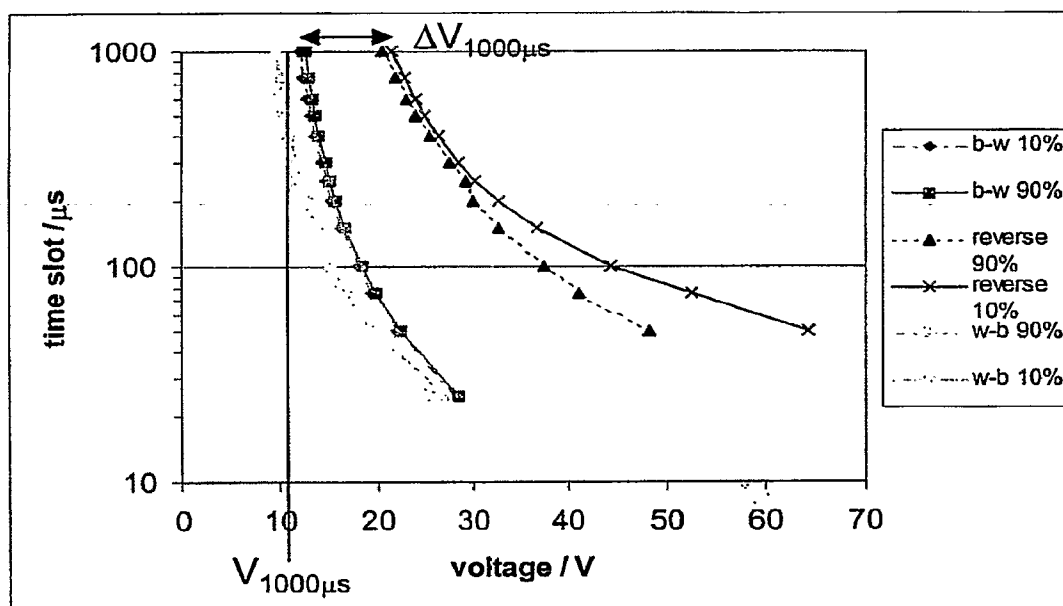


Figure 4. The τ -V curve for MLC-6204-000 at 25°C (pulse duration or time slot vs. voltage). The switching voltage ($V_{1000\mu s}$) and operating window ($\Delta V_{1000\mu s}$) used for comparisons are indicated.

Chelsea boss Ranieri pinpointed mistakes by his the reason for the defeat against Besiktas. Ranieri blamed the three-man centre-back partnership of Desailly being flanked by William Gallas and William Gallas. But the move did not go to plan as Chelsea were 2-0 down after 29 minutes and failed to score against a resolute Besiktas back-line.



Figure 5: Dual mode LCD operation principle: Laptop display is displaying a proportion of static text and a proportion with a moving image. Static text operates in the bistable mode, the moving image operates in a monostable TFT LCD mode.

24. Feb. 2

Abstract

5 The invention is directed to liquid crystal compositions for use in bistable
liquid crystal devices and to bistable liquid crystal devices containing said
liquid crystal compositions.

10

15

20

25

30

35

